

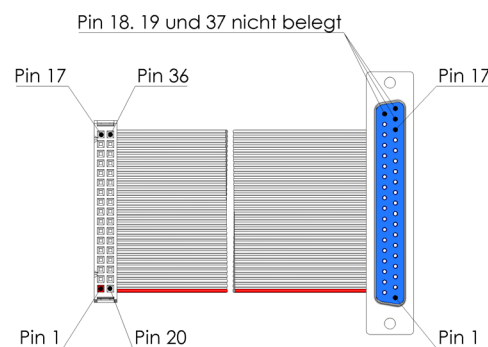




- Connection cable for signal interface blocks (SB-T/P-SI)
- Low-wear connection that can be quickly plugged and unplugged without tools
- Consistently stable signal quality throughout
- Flexible flat ribbon cable for the greatest possible freedom of movement

Application

The connection cable is used for the low-wear, tool-free, quick connection and disconnection of the test side / DUT side signal interface blocks as an alternative connection technology to the classic wire-wrap connection.

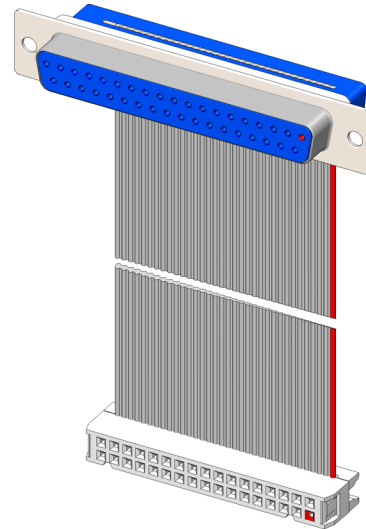

General data

Product group:
Series:
Type:
Version:
Accessory type:
Scope of delivery:
Component assembly:
Colour:
Min. temperature:
Max. temperature:
RoHS-compliant:

Electric accessory
ASK
Flat ribbon cable
34-pole IDC connector
Customising accessories
Pre-wired
Grey, pin 1 red
-5 °C [23 °F]
105 °C [221 °F]
Yes

Compatible with


Interface blocks (SB):

SB-SI-136

Technical data

Connection:
Max. current:
Installation:
Number of poles:
Installation grid:
Diameter:
Cable length:

37-pole D-Subconnector
1.5 A
Plug connector
34
2.54 mm [.1 in]
AWG28 mm
180 mm [7.08 in]

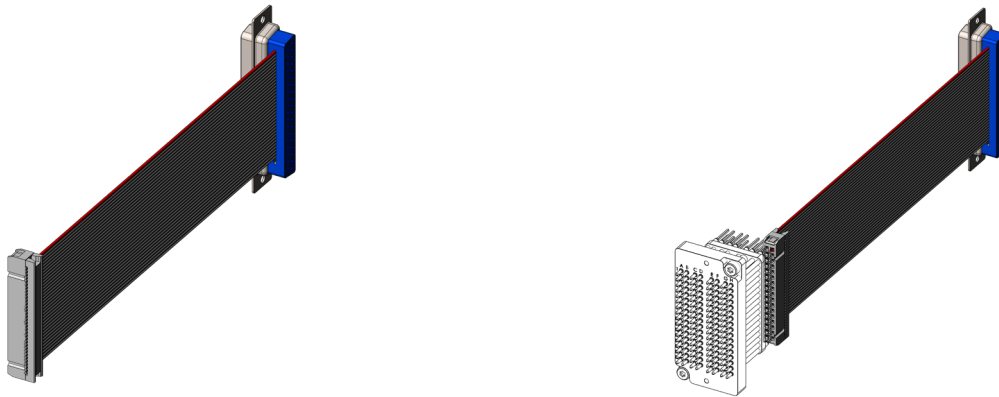

Accessories

Part no.	Designation	Version	Assembly
Signal interface blocks for test system side SB-T-SI			
36800	SB-T-SI-136-4A	Square post	136 Slots with KS-945 47 and GKS-945 357 106 A 1100
109465	SB-T-SI-136-4A-Z	Centring pin, square post	136 Slots with KS-945 47 and GKS-945 357 106 A 1100
Signal interface blocks for DUT side SB-P-SI			
33665	SB-P-SI-136-4A-0,6	Square post	136 Slots with KT-158 06
109467	SB-P-SI-136-4A-0,6-Z	Centring bush, square post	136 Slots with KT-158 06

INGUN Prüfmittelbau GmbH

Max-Stromeyer-Straße 162
 78467, Constance, Germany
 Phone +49 7531 8105-0
 Customer hotline +49 7531 8105-888
 Fax +49 7531 8105-65
 info@ingun.com

