

# Interface

## SST-VPC-S6

Item 113433



GO TO PRODUCT

**ingun**<sup>®</sup>

Partner for Future Technology


- VIRGINIA PANEL VPC-S6 interface
- Reliable connection from test fixture to system interface
- Quick, easy installation on the back of the test fixture using a compatible interface

### Application

Using the interface as a connection/transfer mechanism, signals can be reliably transmitted between the test fixture and the test system. It is installed on the back of the test fixture using a suitable interface frame.

### Delivery

The interface is unpopulated upon delivery.

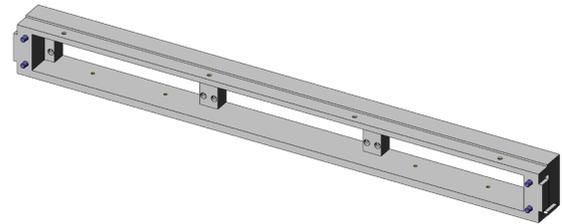

### General data

Product group:	Fixture interfaces
Series:	SST
Type:	Virginia Panel Corporation
Version:	VPC-S6
Accessory type:	Additional function
Scope of delivery:	Unpopulated, 6 free slots
Width:	31.8 mm [1.25 in]
Height:	44.5 mm [1.75 in]
Weight:	1.15 kg [2.53 lbs]
Min. temperature:	10 °C [50 °F]
Max. temperature:	60 °C [140 °F]
RoHS-compliant:	Yes

### Compatible with

Manual test fixtures (MA):	MA xx12
Vacuum test fixtures (VA):	VA 4030
Accessories:	SSA-VPC-S6

### Technical data

Length:	462 mm [18.1 in]
Outer dimensionS (WxDxH):	462 x 31.8 x 44.5 mm [18.1 x 1.25 x 1.75 in]

### Interface supports

Part no.	Designation	Version
113981	SSA-VPC-S6-MAxx12	Suitable to manual test fixtures MA xx12
113593	SSA-VPC-S6-VA4030	Suitable to vacuum test fixtures VA 4030

### INGUN Prüfmittelbau GmbH

Max-Stromeyer-Straße 162  
78467, Constance, Germany  
Phone +49 7531 8105-0  
Customer hotline +49 7531 8105-888  
Fax +49 7531 8105-65  
info@ingun.com



Prices and delivery times on request.  
Technical changes reserved. 03/26\_GB