

Interface

SST-TSH5x-1280

Item 109511



GO TO PRODUCT

ingun[®]

Partner for Future Technology


- TERADYNE TSH5x interface
- Reliable connection from interchangeable to system interface
- Quick, easy installation on the bottom of the interchangeable kit

Application

The interface is used as a connection/transfer mechanism to reliably transfer signals between the test fixture and test system. It is mounted on the bottom of the interchangeable kit.

Delivery

The interfaces are delivered fully loaded.

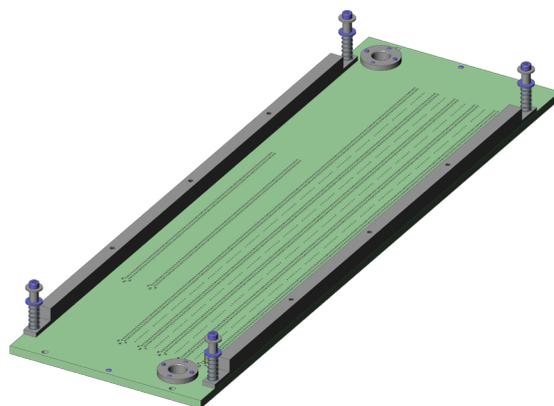

General data

Product group:	Fixture interfaces
Series:	SST
Type:	Teradyne
Version:	TSH5x
Accessory type:	Additional function
Scope of delivery:	Equipped, 1920 KT-158 02
Max. interface signals:	1280
Width:	152 mm [5.98 in]
Height:	19.5 mm [.767 in]
Weight:	1.3 kg [2.86 lbs]
Min. temperature:	10 °C [50 °F]
Max. temperature:	60 °C [140 °F]
RoHS-compliant:	Yes

Compatible with

Interchangeable kits (WS): WS Teradyne/TSH5x

Technical data

Length: 496 mm [19.5 in]
Outer dimensionS (WxDxH): 152 x 496 x 19.5 mm [5.98 x 19.5 x .767 in]

INGUN Prüfmittelbau GmbH

Max-Stromeyer-Straße 162
78467, Constance, Germany
Phone +49 7531 8105-0
Customer hotline +49 7531 8105-888
Fax +49 7531 8105-65
info@ingun.com



Prices and delivery times on request.
Technical changes reserved. 03/26_GB