

Interface support

SSA-ODU-TWO-M-VA4060

Item 115758



GO TO PRODUCT


ingun[®]

Partner for Future Technology

- Interface support für ODU-MAC® Mass Interconnect interface
- Ideally designed for VA 4060 test fixtures
- Quick, easy installation on the back of the test fixture
- Reliable connection from test fixture to system interface

Application

The interface frame (SSA) is used for reliable connection of the interface (SST) to the test fixture.

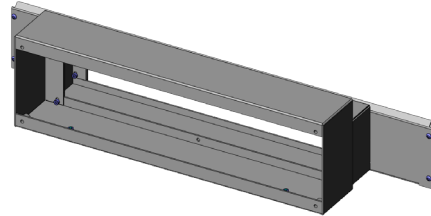

General data

Product group:	Housing
Series:	SSA-VAxxxx
Type:	ODU-MAC Black-Line
Version:	12-Flex TWO M
Accessory type:	Additional function
Scope of delivery:	Unassembled
Width:	142 mm [5.59 in]
Height:	143 mm [5.62 in]
Weight:	1.55 kg [3.41 lbs]
Min. temperature:	10 °C [50 °F]
Max. temperature:	60 °C [140 °F]
RoHS-compliant:	Yes

Compatible with

Vacuum test fixtures (VA):	VA 4060
Accessories:	SST-ODU-TWO-M

Technical data

Length:	645 mm [25.3 in]
Outer dimensionS (WxDxH):	645 x 142 x 143 mm [25.3 x 5.59 x 5.62 in]

INGUN Prüfmittelbau GmbH

Max-Stromeyer-Straße 162
78467, Constance, Germany
Phone +49 7531 8105-0
Customer hotline +49 7531 8105-888
Fax +49 7531 8105-65
info@ingun.com



Prices and delivery times on request.
Technical changes reserved. 12/25_GB

Learn more about
Test fixture kits

