


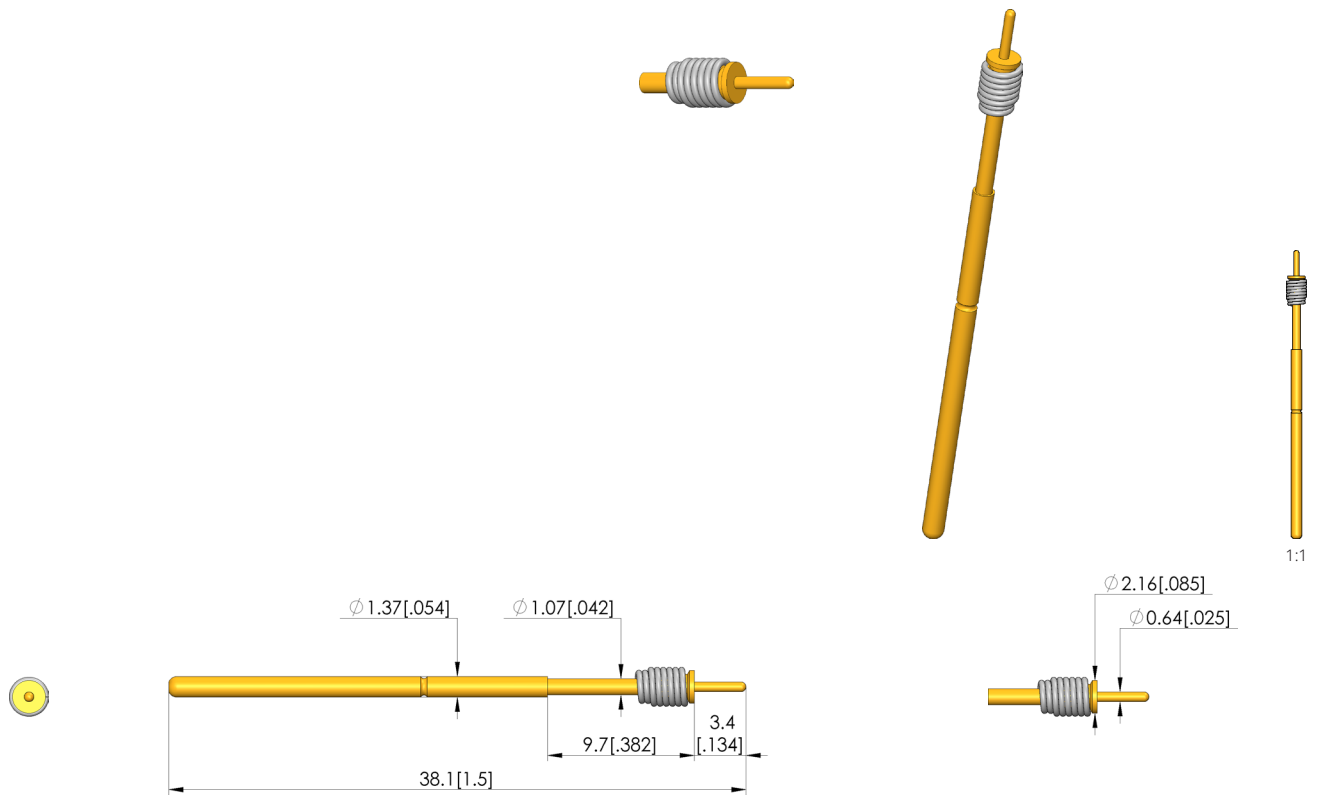

General data

Product group:
Sub-product group:
Series:
Grid:
Contacting from:
Magnetic:
Installation type:
Quick-exchange system:
Adjustable installation height:
Non-rotating:
Compatible receptacle(s):
Min. temperature:
Max. temperature:
RoHS-compliant:

Testjet test probe
Testjet test probe
GKS-925
2.54 mm [100 mil]
Pad
Yes
Plug-in
Yes
No
No
KS-100
-40 °C [-40 °F]
80 °C [176 °F]
Yes

Tip style data

Tip style:
Tip diameter:
Tip style surface:
Tip style material:
Step probe tip height:
Disk diameter:

05 bullet-nosed (full radius)
0.64 mm [.025 in]
A gold
1 brass
3.4 mm [.133 in]
2.15 mm [.084 in]

Electrical data

Current load capacity / rated current:
Typical resistance (Ri):

5 A
20 mOhm

Mechanical data

Total length:
Barrel diameter:
Maximum stroke:
Spring pre-load:
Collar height:
Spring force at working stroke:
Recommended working stroke:

38.1 mm [1.5 in]
1.37 mm [.053 in]
5.5 mm [.216 in]
0.29 N [1.04 ozf]
00
1 N [3.59 ozf]
5 mm [.196 in]

Test Probe


GKS-925 TJ A 1000-S

Item GKS-925TJA1000-S



ingun[®]

Partner for Future Technology

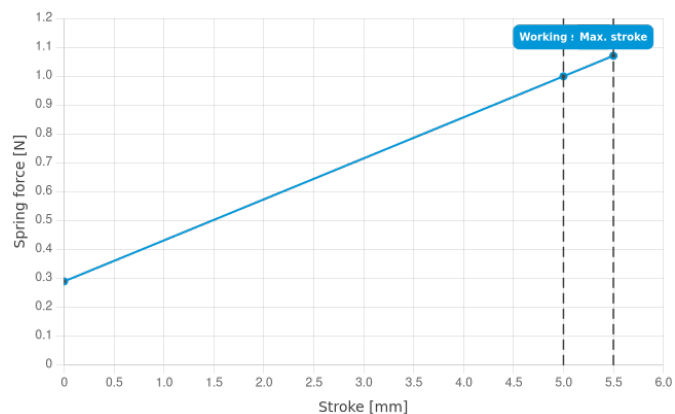

INGUN Prüfmittelbau GmbH

Max-Stromeyer-Straße 162
78467, Constance, Germany
Phone +49 7531 8105-0
Customer hotline +49 7531 8105-888
Fax +49 7531 8105-65
info@ingun.com



Prices and delivery times on request.
Technical changes reserved. 12/25_GB

Learn more about
Test probes

