

# Test Probe

## GKS-925 TJ A 1000-S


Item GKS-925TJA1000-S



GO TO PRODUCT

**ingun**<sup>®</sup>

Partner for Future Technology

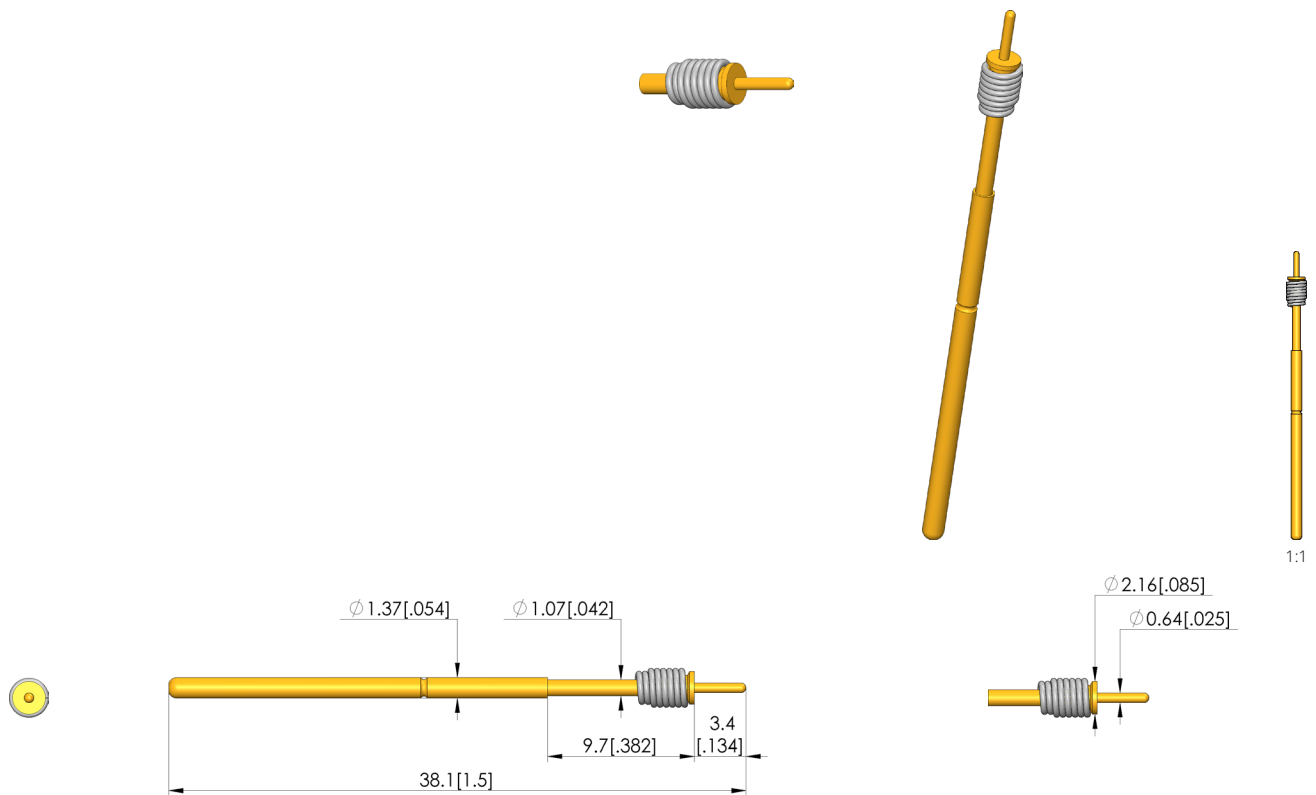

### General data

Product group:	Testjet test probe
Sub-product group:	Testjet test probe
Series:	GKS-925
Grid:	2.54 mm [100 mil]
Contacting from:	Pad
Magnetic:	Yes
Installation type:	Plug-in
Quick-exchange system:	Yes
Adjustable installation height:	No
Non-rotating:	No
Compatible receptacle(s):	KS-100
Min. temperature:	-40 °C [-40 °F]
Max. temperature:	80 °C [176 °F]
RoHS-compliant:	Yes

### Tip style data

Tip style:	05 bullet-nosed (full radius)
Tip diameter:	0.64 mm [0.025 in]
Tip style surface:	A gold
Tip style material:	1 brass
Step probe tip height:	3.4 mm [.133 in]
Disk diameter:	2.15 mm [.084 in]

### Electrical data

Current load capacity / rated current:	5 A
Typical resistance (Ri):	20 mOhm

### Mechanical data

Total length:	38.1 mm [1.5 in]
Barrel diameter:	1.37 mm [0.053 in]
Maximum stroke:	5.5 mm [.216 in]
Spring pre-load:	0.29 N [1.04 ozf]
Collar height:	00
Spring force at working stroke:	1 N [3.59 ozf]
Recommended working stroke:	5 mm [.196 in]

# Test Probe


## GKS-925 TJ A 1000-S

Item GKS-925TJA1000-S



**ingun**<sup>®</sup>

Partner for Future Technology

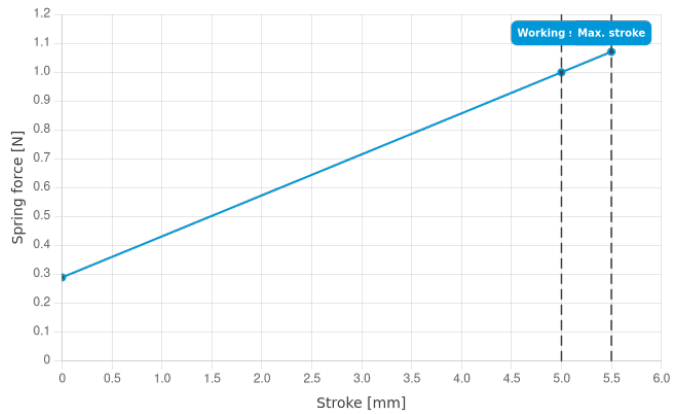

### INGUN Prüfmittelbau GmbH

Max-Stromeyer-Straße 162  
78467, Constance, Germany  
Phone +49 7531 8105-0  
Customer hotline +49 7531 8105-888  
Fax +49 7531 8105-65  
info@ingun.com



Prices and delivery times on request.  
Technical changes reserved. 01/26\_GB

Learn more about  
Test probes

