

Receptacle

KS-200


Item KS-200




GO TO PRODUCT

ingun[®]

Partner for Future Technology



1:1

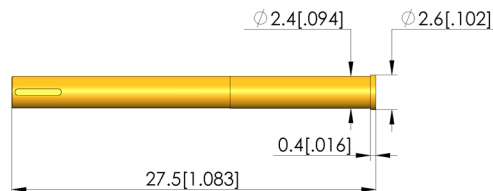

General data

Product group:
Series:
Sub-series:
Type of receptacle connection:
Press ring:
Surface area:
Collar diameter:
Collar height:
Knurl:
Vacuum-tight:
RoHS-compliant:

Receptacles (KS)
KS-200
KS-200 press-in version
Solder outer surface
No
Gold
2.6 mm [.102 in]
0.4 mm [.015 in]
No
No
Yes

Mechanical data

Total length: 27.5 mm [1.08 in]
Outer diameter: 2.4 mm [.094 in]

Mounting hole

Mounting hole in CEM1: 2.38 – 2.39 mm [.093 – .094 in]
Mounting hole in FR4: 2.38 – 2.39 mm [.093 – .094 in]

INGUN Prüfmittelbau GmbH

Max-Stromeyer-Straße 162
78467, Constance, Germany
Phone +49 7531 8105-0
Customer hotline +49 7531 8105-888
Fax +49 7531 8105-65
info@ingun.com



Prices and delivery times on request.
Technical changes reserved. 12/25_GB

Learn more about
Test probes

