

Receptacle

KS-079 35 V-26


Item KS-07935V-26




GO TO PRODUCT

ingun[®]

Partner for Future Technology



1:1

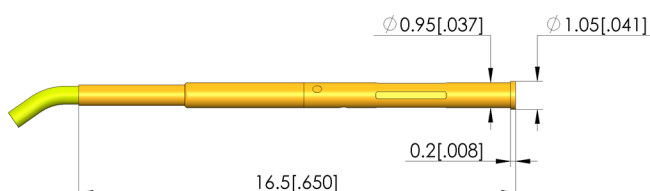

General data

Product group: Receptacles (KS)
 Series: KS-079
 Sub-series: KS-079 press-in version
 Type of receptacle connection: Pre-wired
 Press ring: No
 Surface area: Gold
 Collar diameter: 1.05 mm [.041 in]
 Collar height: 0.2 mm [.007 in]
 Knurl: No
 Vacuum-tight: yes (< 1 ccm / min)
 RoHS-compliant: Yes

Wiring data

Wire type AWG:	26 FEP
Wire type:	Solid
Insulating material:	Tefzel
Wire outer diameter:	0.67 mm [.026 in]
Wire length:	1,000 mm [39.3 in]
Wire diameter:	0.4 mm [.015 in]
Wire colour:	Yellow
Kink protection:	No

Mechanical data

Total length:	16.5 mm [.649 in]
Outer diameter:	0.95 mm [.037 in]

Mounting hole

Mounting hole in CEM1:	0.94 – 0.95 mm [.037 – .037 in]
Mounting hole in FR4:	0.94 – 0.95 mm [.037 – .037 in]

INGUN Prüfmittelbau GmbH

Max-Stromeyer-Straße 162
 78467, Constance, Germany
 Phone +49 7531 8105-0
 Customer hotline +49 7531 8105-888
 Fax +49 7531 8105-65
 info@ingun.com



Prices and delivery times on request.
 Technical changes reserved. 03/26_GB

Learn more about
Test probes



RECEPTACLES

ingun.com