




GO TO PRODUCT

- Safe, simple, power-assisted opening of the housing
- Assembly kit to replace pre-installed telescopic struts
- For use in standard and tall housings

### Application

Two gas springs in the housing support the safe, simple, power-assisted opening of the housing and increase ease of use.



### General data

|                    |                                                     |
|--------------------|-----------------------------------------------------|
| Product group:     | Functional units                                    |
| Series:            | FB-MAxxxx                                           |
| Type:              | Gas spring cover strut                              |
| Version:           | MA xxxx                                             |
| Accessory type:    | Additional function                                 |
| Scope of delivery: | 2 x gas spring (GDF) incl. installation accessories |
| Weight:            | 1.96 kg [4.32 lbs]                                  |
| Min. temperature:  | 10 °C [50 °F]                                       |
| Max. temperature:  | 60 °C [140 °F]                                      |
| RoHS-compliant:    | Yes                                                 |


### Compatible with

Manual test fixtures (MA):

MA xx14

### Technical data

|         |                   |
|---------|-------------------|
| Stroke: | 120 mm [4.72 in]  |
| Force:  | 300 N [1,079 ozf] |
| Length: | 305 mm [12 in]    |

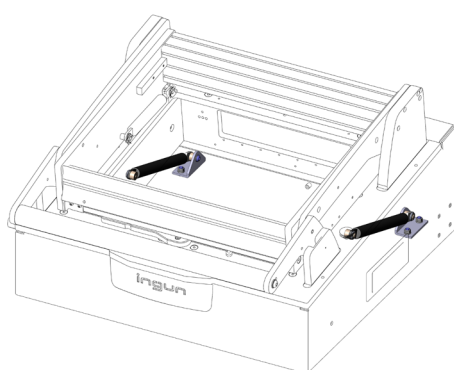

### INGUN Prüfmittelbau GmbH

Max-Stromeyer-Straße 162  
78467, Constance, Germany  
Phone +49 7531 8105-0  
Customer hotline +49 7531 8105-888  
Fax +49 7531 8105-65  
info@ingun.com



Learn more about  
MA functional units

