

Interface

SST-VPC-G12X

Item 113437



GO TO PRODUCT

ingun[®]

Partner for Future Technology


- VIRGINIA PANEL VPC-G12x interface
- Reliable connection from test fixture to system interface
- Quick, easy installation on the back of the test fixture using a compatible interface

Application

Using the interface as a connection/transfer mechanism, signals can be reliably transmitted between the test fixture and the test system. It is installed on the back of the test fixture using a suitable interface frame.

Delivery

The interface is unpopulated upon delivery.

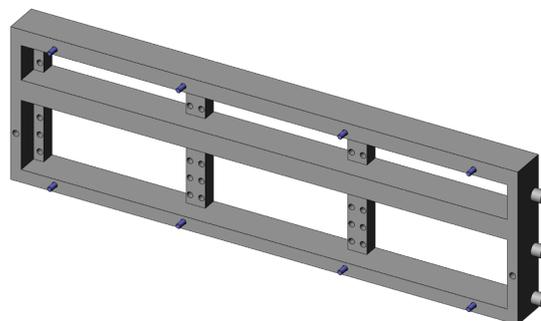

General data

Product group:	Fixture interfaces
Series:	SST
Type:	Virginia Panel Corporation
Version:	VPC-G12x
Accessory type:	Additional function
Scope of delivery:	Unpopulated, 18 free slots
Width:	31.8 mm [1.25 in]
Height:	136 mm [5.37 in]
Weight:	2.05 kg [4.51 lbs]
Min. temperature:	10 °C [50 °F]
Max. temperature:	60 °C [140 °F]
RoHS-compliant:	Yes

Compatible with

Manual test fixtures (MA):	MA xx14
Vacuum test fixtures (VA):	4060
Accessories:	SSA-VPC-G12X

Technical data

Length:	468 mm [18.4 in]
Outer dimensionS (WxDxH):	468 x 31.8 x 136 mm [18.4 x 1.25 x 5.37 in]

Interface supports

Part no.	Designation	Version
114022	SSA-VPC-G12X-MAxx12	Suitable to manual test fixtures MA xx12
114024	SSA-VPC-G12X-MAxx13	Suitable to manual test fixtures MA xx13
114026	SSA-VPC-G12X-MAxx14	Suitable to manual test fixtures MA xx14
115562	SSA-VPC-G12X-VA4030	Suitable to vacuum test fixtures VA 4030
115565	SSA-VPC-G12X-VA4040	Suitable to vacuum test fixtures VA 4040
115566	SSA-VPC-G12X-VA4060	Suitable to vacuum test fixtures VA 4060

INGUN Prüfmittelbau GmbH

Max-Stromeyer-Straße 162
78467, Constance, Germany
Phone +49 7531 8105-0
Customer hotline +49 7531 8105-888
Fax +49 7531 8105-65
info@ingun.com

