

pressure spring

FED-10,0-16,0-97N-09,0

Item 1571






ingun[®]

Partner for Future Technology


- Bewährte, rechts gewickelte, Druckfeder
- Highest spring steel quality for maximum breakage resistance
- Gleichbleibende, konstante Steigung
- Lineare Federkennlinie

Application

Federn (FED) werden als Druckelement verwendet, um die Andruckplatte mit dem Prüfling, nach der Kontaktierung auf das Ursprungsniveau zurück zu heben. Sie werden typischerweise auf der Kontaktträgerplatte montiert.

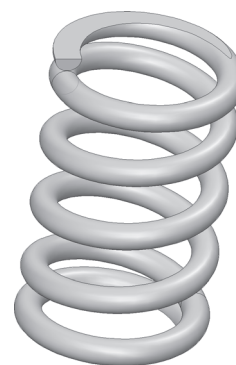

$F_n = \sim 97 \text{ N [348 ozf]}$



General data

Product group:
Series:
Type:
Version:
Accessory type:
Material:
Height:
Weight:
Min. temperature:
Max. temperature:
RoHS-compliant:

Pressure springs
FED
Pressure spring
Customising accessories
EN 10270-1-DH
16 mm [.629 in]
0.01 kg [.022 lbs]
10 °C [50 °F]
60 °C [140 °F]
Yes

Compatible with

Vacuum test fixtures (VA):

VA 2xxx

Technical data

Force:
Length:
Diameter:

97 N [348 ozf]
9 mm [.354 in]
10 mm [.393 in]

INGUN Prüfmittelbau GmbH

Max-Stromeyer-Straße 162
78467, Constance, Germany
Phone +49 7531 8105-0
Customer hotline +49 7531 8105-888
Fax +49 7531 8105-65
info@ingun.com



Prices and delivery times on request.
Technical changes reserved. 11/25_GB