

Test Probe

GKS-365 105 400 A 3001

Item GKS-365-0004





GO TO PRODUCT




ingun[®]

Partner for Future Technology

- Extremely robust test probes for applications with unwanted side and axial forces
- For use in applications with limited space

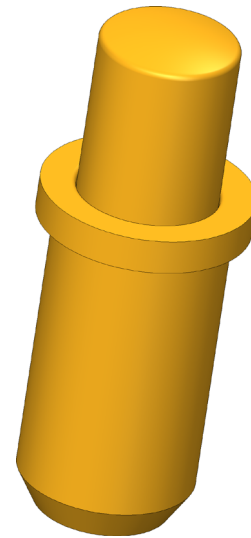

1:1

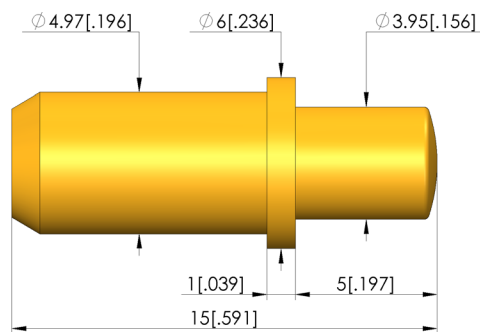

General data

Product group:
Sub-product group:
Series:
Grid:
Contacting from:
Magnetic:
Installation type:
Quick-exchange system:
Adjustable installation height:
Non-rotating:
Compatible receptacle(s):
Min. temperature:
Max. temperature:
RoHS-compliant:

Assorted test probes
Short stroke GKS / charge and transfer GKS
GKS-365
6.5 mm [255 mil]
Pad
Yes
Plug-in
Yes
No
No
KS-365
-40 °C [-40 °F]
80 °C [176 °F]
Yes

Tip style data

Tip style:
Tip diameter:
Tip style surface:
Tip style material:

05 bullet-nosed (full radius)
4 mm [.157 in]
A gold
1 brass

Electrical data

Current load capacity / rated current:
Typical resistance (Ri):

8 A
30 mOhm

Mechanical data

Total length:
Barrel diameter:
Maximum stroke:
Spring pre-load:
Collar height:
Spring force at working stroke:
Recommended working stroke:

15 mm [.59 in]
4.97 mm [.195 in]
4 mm [.157 in]
1.15 N [4.13 ozf]
1
3 N [10.7 ozf]
3.2 mm [.125 in]

Test Probe


GKS-365 105 400 A 3001

Item GKS-365-0004



ingun[®]

Partner for Future Technology

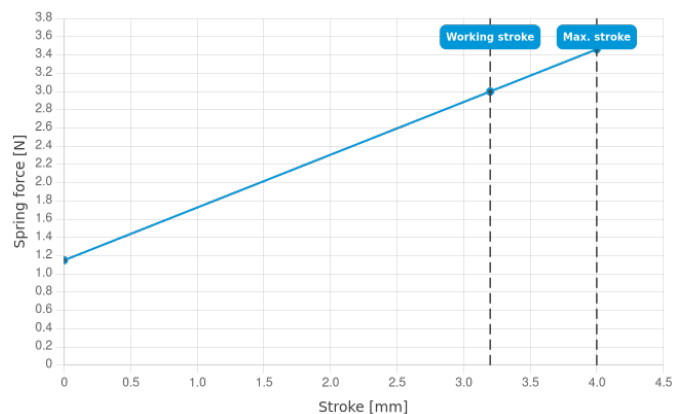

INGUN Prüfmittelbau GmbH

Max-Stromeyer-Straße 162
78467, Constance, Germany
Phone +49 7531 8105-0
Customer hotline +49 7531 8105-888
Fax +49 7531 8105-65
info@ingun.com



Prices and delivery times on request.
Technical changes reserved. 11/25_GB

Learn more about
Test probes

