



GO TO PRODUCT


- TERADYNE (LH, 12X) GR228x-15/15 interface
- Reliable connection from test fixture to system interface
- Quick, easy installation on the bottom of the test fixture using a compatible interface

Application

Using the interface as a connection/transfer mechanism, signals can be reliably transmitted between the test fixture and the test system. It is installed on the bottom of the test fixture using a suitable interface frame.

Delivery

The interfaces are delivered fully loaded.

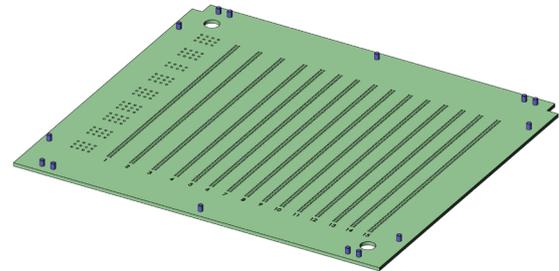

General data

Product group:	Fixture interfaces
Series:	SST
Type:	Teradyne (LH, 12X)
Version:	GR228x-15/15
Accessory type:	Additional function
Scope of delivery:	Loaded, 15 slots, 2400 KT-158-02
Max. interface signals:	1536
Width:	292 mm [11.5 in]
Height:	6 mm [.236 in]
Weight:	1.3 kg [2.86 lbs]
Min. temperature:	10 °C [50 °F]
Max. temperature:	60 °C [140 °F]
RoHS-compliant:	Yes

Compatible with

Manual test fixtures (MA):	MA xx13
Vacuum test fixtures (VA):	4060
Accessories:	SSA-GR228x-15

Technical data

Length:	330 mm [13 in]
Outer dimensionS (WxDxH):	330 x 292 x 6 mm [13 x 11.5 x .236 in]

Interface supports

Part no.	Designation	Version
113522	SSA-GR228x-15-MAxx13	Suitable to manual test fixtures MA xx13
113517	SSA-GR228x-15-VA4030	Suitable to vacuum test fixtures VA 4030
113483	SSA-GR228x-15-VA4040	Suitable to vacuum test fixtures VA 4040
113518	SSA-GR228x-15-VA4060	Suitable to vacuum test fixtures VA 4060

INGUN Prüfmittelbau GmbH

Max-Stromeyer-Straße 162
78467, Constance, Germany
Phone +49 7531 8105-0
Customer hotline +49 7531 8105-888
Fax +49 7531 8105-65
info@ingun.com

