

Receptacle

KS-300


Item KS-300




GO TO PRODUCT

ingun[®]

Partner for Future Technology

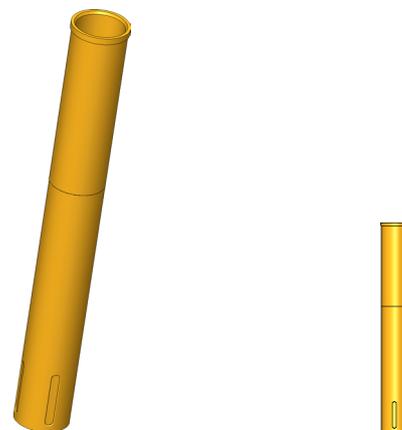

1:1

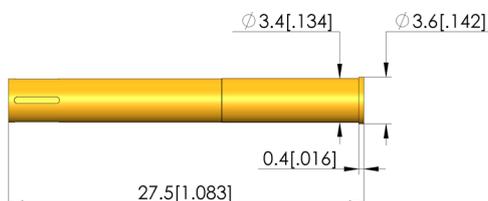

General data

Product group: Receptacles (KS)
Series: KS-300
Sub-series: KS-300 press-in version
Type of receptacle connection: Solder outer surface
Press ring: No
Surface area: Gold
Collar diameter: 3.6 mm [.141 in]
Collar height: 0.4 mm [.015 in]
Knurl: No
Vacuum-tight: No
RoHS-compliant: Yes

Mechanical data

Total length: 27.5 mm [1.08 in]
Outer diameter: 3.4 mm [.133 in]

Mounting hole

Mounting hole in CEM1: 3.38 – 3.39 mm [.133 – .133 in]
Mounting hole in FR4: 3.38 – 3.39 mm [.133 – .133 in]

INGUN Prüfmittelbau GmbH

Max-Stromeyer-Straße 162
78467, Constance, Germany
Phone +49 7531 8105-0
Customer hotline +49 7531 8105-888
Fax +49 7531 8105-65
info@ingun.com



Prices and delivery times on request.
Technical changes reserved. 01/26_GB

Learn more about
Test probes

