









Durchgangsprüfung

Zur Überprüfung von möglichen offenen Verbindungen, Kurzschlüssen und Fehlverdrahtungen



1:1

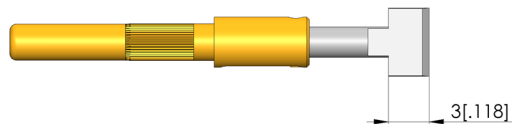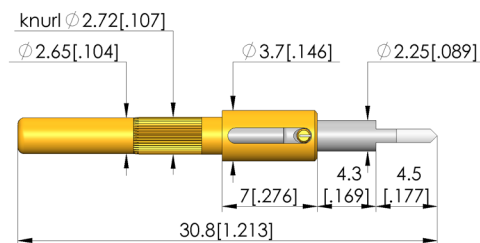

General data

Product group:
Sub-product group:
Series:
Grid:
Contacting from:
Magnetic:
Installation type:
Quick-exchange system:
Adjustable installation height:
Non-rotating:
Compatible receptacle(s):
Min. temperature:
Max. temperature:
RoHS-compliant:

Screw-in test probe
Non-rotating test probes
GKS-714
5.08 mm [200 mil]
Female connector
Yes
Plug-in
Yes
No
Yes
KS-714 23
-40 °C [-40 °F]
80 °C [176 °F]
Yes

Tip style data

Tip style: 20 spade, flat, bevelled, self-cleaning
Tip diameter: 5 mm [.196 in]
Tip style surface: R rhodium
Tip style material: 2 steel
Spade width: 1 mm [.039 in]
Spade length: 4.5 mm [.177 in]

Electrical data

Current load capacity / rated current: 8 A
Typical resistance (Ri): 30 mOhm

Mechanical data

Total length: 30.8 mm [1.21 in]
Barrel diameter: 2.65 mm [.104 in]
Maximum stroke: 5 mm [.196 in]
Spring pre-load: 1 N [3.59 ozf]
Collar height: 07
Spring force at working stroke: 3 N [10.7 ozf]
Recommended working stroke: 4 mm [.157 in]

Test Probe


GKS-714 220 510 R 3007

Item GKS-714-0006



ingun[®]

Partner for Future Technology

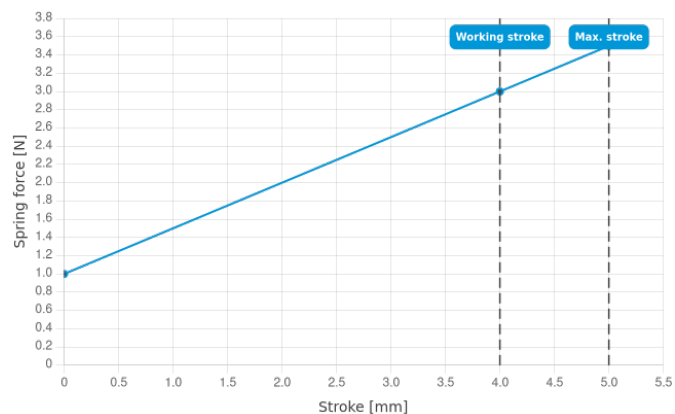

INGUN Prüfmittelbau GmbH

Max-Stromeyer-Straße 162
78467, Constance, Germany
Phone +49 7531 8105-0
Customer hotline +49 7531 8105-888
Fax +49 7531 8105-65
info@ingun.com



Prices and delivery times on request.
Technical changes reserved. 12/25_GB

Learn more about
Screw-in test probe



[ingun.com](https://www.ingun.com)

SCREW-IN TEST PROBE