

# Test Probe

## GKS-051 303 150 A 1300

Item GKS-051-0011






GO TO PRODUCT

# ingun®

Partner for Future Technology

- Inner conductor for RF test probes (HFS)
- Can be used for service or repair

### INGUN SELECTION

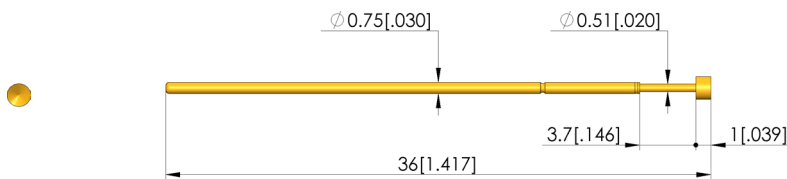

#### General data

Product group:  
Sub-product group:  
Series:  
Grid:  
Contacting from:  
Magnetic:  
Installation type:  
Quick-exchange system:  
Adjustable installation height:  
Non-rotating:  
Min. temperature:  
Max. temperature:  
RoHS-compliant:

Accessories (GKS / ADA)  
RF inner conductor  
GKS-051  
1.91 mm [75.1 mil]  
Post  
Yes  
Plug-in  
Yes  
No  
No  
-40 °C [-40 °F]  
80 °C [176 °F]  
Yes

#### Tip style data

Tip style:  
Tip diameter:  
Tip style surface:  
Tip style material:

03 inverse cone  
1.5 mm [.059 in]  
A gold  
3 CuBe

#### Electrical data

Current load capacity / rated current:  
Typical resistance (Ri):

2 A  
20 mOhm

#### Mechanical data

Total length:  
Barrel diameter:  
Maximum stroke:  
Spring pre-load:  
Collar height:  
Spring force at working stroke:  
Recommended working stroke:

36 mm [1.41 in]  
0.75 mm [.029 in]  
3.7 mm [.145 in]  
0.7 N [2.51 ozf]  
00  
1.3 N [4.67 ozf]  
2 mm [.078 in]

#### INGUN Prüfmittelbau GmbH

Max-Stromeyer-Straße 162  
78467, Constance, Germany  
Phone +49 7531 8105-0  
Customer hotline +49 7531 8105-888  
Fax +49 7531 8105-65  
info@ingun.com



Prices and delivery times on request.  
Technical changes reserved. 03/26\_GB

Learn more about  
Test probes



ingun.com