Interface block

SB-P-SO-002-USB-RJ45

Item 54752

GO TO PRODUCT

Partner for Future Technology

- Populated with USB2.0A, RJ45 socket STV-USB2.0A/ RJ45CAT05-F-EB-SR
- Can be used in test fixtures with Pylon interface for use on the test specimen side
- Reliable signal transmission within the scope of the specification

Application

Interface blocks (SB) are used to reliably transmit signals between test device and test system in internal and external Pylon interfaces. Specialised blocks are suitable for the reliable transmission of signals within the scope of their specification. They are only available for use on the DUT side.

Delivery

The product is delivered fully assembled including the installation accessories.

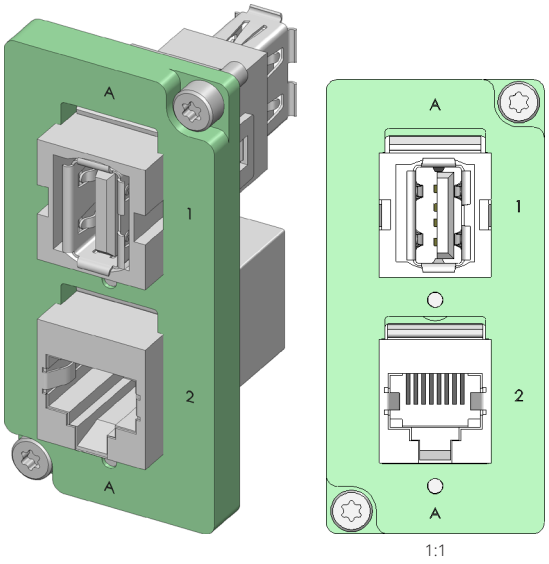



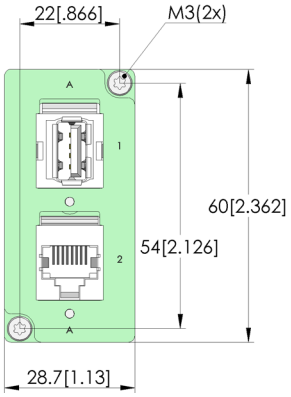

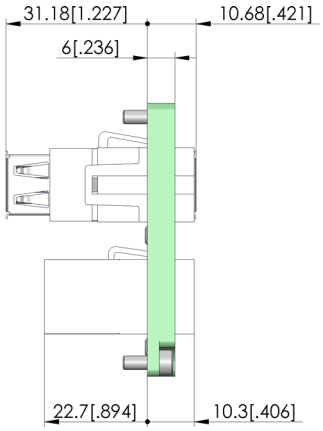



General data

Product group:	Interface blocks (SB)
Series:	SB-SO
Type:	Specialised block
Version:	Device under test (DUT) side
Accessory type:	Customising accessories
Component assembly:	STV-USB2.0A/RJ45-F-EB-SR
Weight:	0.07 kg [.154 lbs]
Min. temperature:	-20 °C [-4 °F]
Max. temperature:	50 °C [122 °F]
RoHS-compliant:	Yes

Compatible with

MA exchangeable kits (ATS MA):	ATS MAxx

Technical data

Connection:	USB2.0 A, RJ45 socket
Number of poles:	2 (fixed positions)

INGUN Prüfmittelbau GmbH
Max-Stromeyer-Straße 162
78467, Constance, Germany
Phone +49 7531 8105-0
Customer hotline +49 7531 8105-888
Fax +49 7531 8105-65
info@ingun.com

Prices and delivery times on request.
Technical changes reserved. 03/26_GB