

# Receptacle

## KS-069 35 V-26

Item KS-06935V-26




GO TO PRODUCT

**ingun**<sup>®</sup>

Partner for Future Technology

### INGUN SELECTION

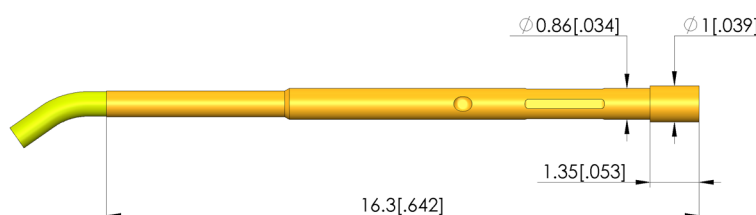

#### General data

Product group:  
Series:  
Sub-series:  
Type of receptacle connection:  
Press ring:  
Surface area:  
Collar diameter:  
Collar height:  
Knurl:  
Vacuum-tight:  
RoHS-compliant:

Receptacles (KS)  
KS-069  
KS-069 press-in version  
Pre-wired  
No  
Gold  
1 mm [.039 in]  
1.35 mm [.053 in]  
No  
yes (< 1 ccm / min)  
Yes

#### Wiring data

Wire type AWG:  
Wire type:  
Insulating material:  
Wire outer diameter:  
Wire length:  
Wire diameter:  
Wire colour:  
Kink protection:

26 FEP  
Solid  
Tefzel  
0.67 mm [.026 in]  
1,000 mm [39.3 in]  
0.4 mm [.015 in]  
Yellow  
No

#### Mechanical data

Total length:  
Outer diameter:

16.3 mm [.641 in]  
0.86 mm [.033 in]

#### Mounting hole

Mounting hole in CEM1:  
Mounting hole in FR4:

0.85 – 0.86 mm [.033 – .033 in]  
0.85 – 0.86 mm [.033 – .033 in]

#### INGUN Prüfmittelbau GmbH

Max-Stromeyer-Straße 162  
78467, Constance, Germany  
Phone +49 7531 8105-0  
Customer hotline +49 7531 8105-888  
Fax +49 7531 8105-65  
info@ingun.com



Prices and delivery times on request.  
Technical changes reserved. 12/25\_GB

Learn more about  
Test probes



ingun.com