

Receptacle

KS-050 47 E08

Item KS-05047E08




GO TO PRODUCT

ingun[®]

Partner for Future Technology

INGUN SELECTION

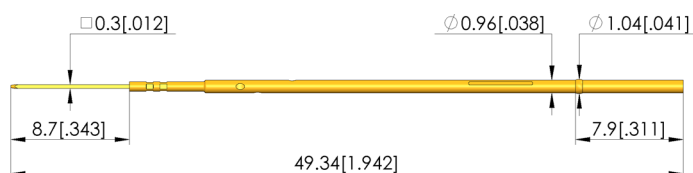

General data

Product group:
Series:
Sub-series:
Type of receptacle connection:
Press ring:
Surface area:
Collar diameter:
Collar height:
Wire-wrap post length:
Knurl:
Vacuum-tight:
RoHS-compliant:

Receptacles (KS)
KS-050
KS-050 press-in version
Wire-wrap
Yes
Gold
1.04 mm [.04 in]
7.9 mm [.311 in]
8.7 mm [.342 in]
No
yes (< 1 ccm / min)
Yes

Mechanical data

Total length: 49.3 mm [1.94 in]
Outer diameter: 0.95 mm [.037 in]

Mounting hole

Mounting hole in CEM1: 0.98 – 1 mm [.038 – .039 in]
Mounting hole in FR4: 0.98 – 1 mm [.038 – .039 in]
Mounting hole with press ring in CEM1: 0.98 – 1 mm [.038 – .039 in]
Mounting hole with press ring in FR4: 0.98 – 1 mm [.038 – .039 in]

INGUN Prüfmittelbau GmbH

Max-Stromeyer-Straße 162
78467, Constance, Germany
Phone +49 7531 8105-0
Customer hotline +49 7531 8105-888
Fax +49 7531 8105-65
info@ingun.com



Prices and delivery times on request.
Technical changes reserved. 11/25_GB

Learn more about
Test probes



ingun.com

RECEPTACLES