

Receptacle

KS-050 35 M-V-30

Item KS-05035M-V-30




GO TO PRODUCT

ingun[®]

Partner for Future Technology

Kontaktsteckhülsen

Mit Gewinde zum Einpressen in das Trägermaterial

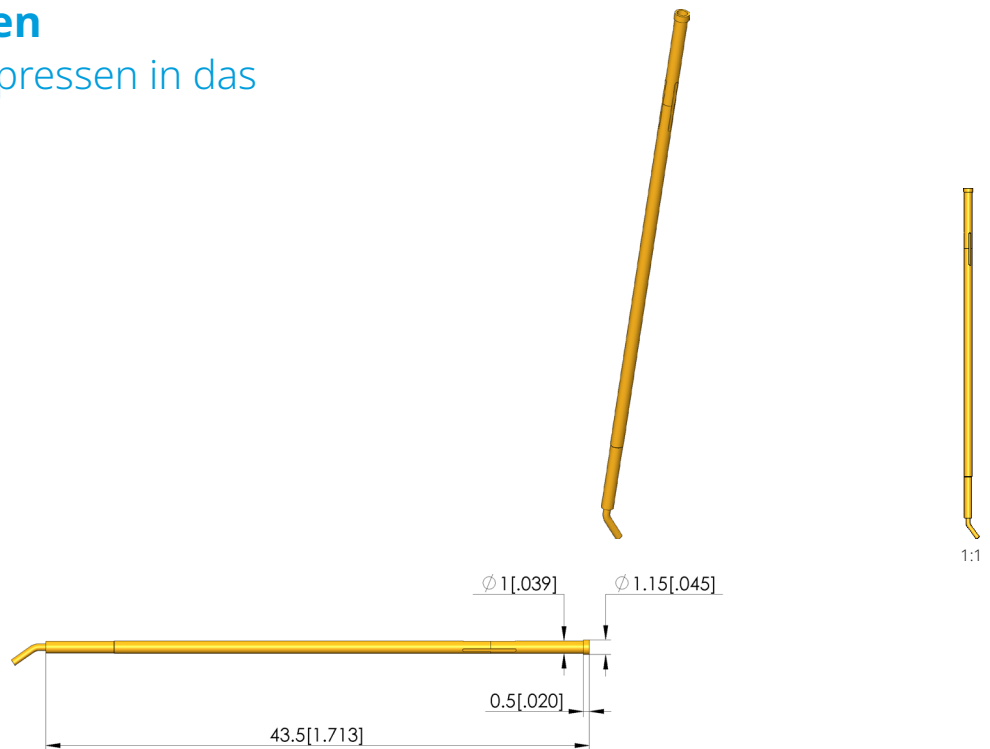

General data

Product group:
Series:
Sub-series:
Type of receptacle connection:
Press ring:
Surface area:
Collar diameter:
Collar height:
Knurl:
Vacuum-tight:
RoHS-compliant:

Receptacles (KS)
KS-050
KS-050 M screw-in version
Pre-wired
No
Gold
1.15 mm [.045 in]
0.5 mm [.019 in]
No
yes (< 1 ccm / min)
Yes

Wiring data

Wire type AWG:
Wire type:
Insulating material:
Wire outer diameter:
Wire length:
Wire diameter:
Wire colour:
Kink protection:

30 type 2
Solid
Tefzel
0.5 mm [.019 in]
1,000 mm [39.3 in]
0.25 mm [.009 in]
Green
No

Mechanical data

Total length:
Outer diameter:

43.5 mm [1.71 in]
1 mm [.039 in]

Mounting hole

Mounting hole in CEM1:
Mounting hole in FR4:

1 – 1.02 mm [.039 – .04 in]
1.01 – 1.03 mm [.039 – .04 in]

INGUN Prüfmittelbau GmbH

Max-Stromeyer-Straße 162
78467, Constance, Germany
Phone +49 7531 8105-0
Customer hotline +49 7531 8105-888
Fax +49 7531 8105-65
info@ingun.com



Prices and delivery times on request.
Technical changes reserved. 11/25_GB

Learn more about
Test probes



ingun.com

RECEPTACLES