

Receptacle

KS-069 30 G


Item KS-06930G



GO TO PRODUCT

ingun[®]

Partner for Future Technology

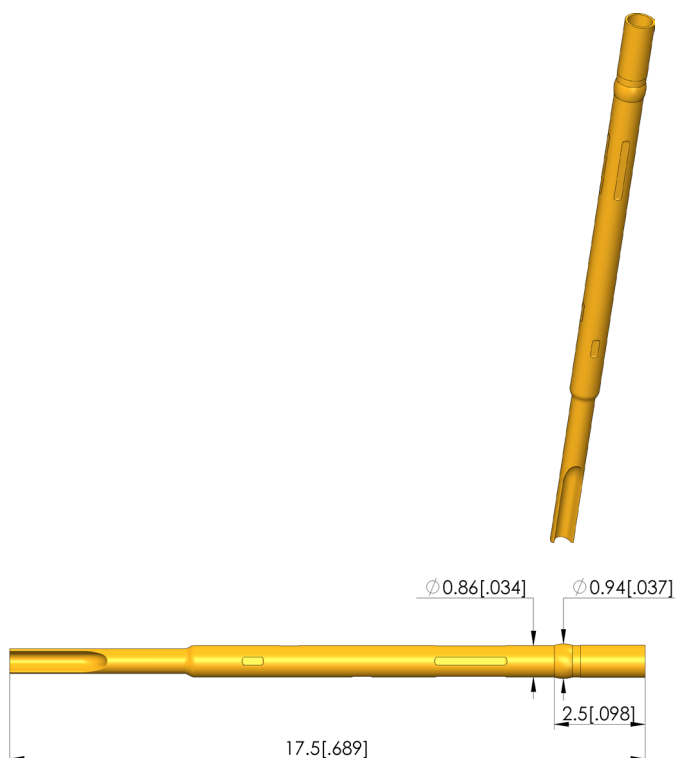

1:1

General data

Product group:
Series:
Sub-series:
Type of receptacle connection:
Press ring:
Surface area:
Collar diameter:
Collar height:
Knurl:
Vacuum-tight:
RoHS-compliant:

Receptacles (KS)
KS-069
KS-069 press-in version
Solder
Yes
Gold
0.94 mm [.037 in]
2.54 mm [.1 in]
No
No
Yes

Mechanical data

Total length: 17.5 mm [.688 in]
Outer diameter: 0.86 mm [.033 in]

Mounting hole

Mounting hole in CEM1: 0.86 – 0.92 mm [.033 – .036 in]
Mounting hole in FR4: 0.86 – 0.92 mm [.033 – .036 in]
Mounting hole with press ring in CEM1: 0.86 – 0.92 mm [.033 – .036 in]
Mounting hole with press ring in FR4: 0.86 – 0.92 mm [.033 – .036 in]

INGUN Prüfmittelbau GmbH

Max-Stromeyer-Straße 162
78467, Constance, Germany
Phone +49 7531 8105-0
Customer hotline +49 7531 8105-888
Fax +49 7531 8105-65
info@ingun.com



Prices and delivery times on request.
Technical changes reserved. 12/25_GB

Learn more about
Test probes



ingun.com

RECEPTACLES