

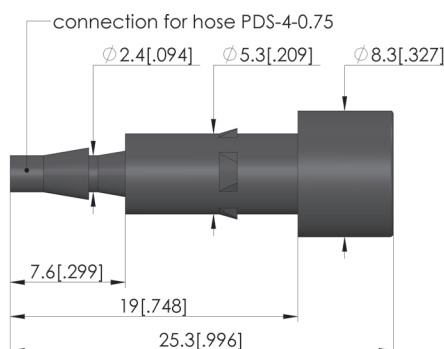




- Pneumatic contact
- With compressed air shut-off

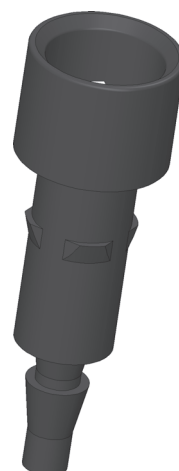

General data

Product group:
Series:
Type:
Version:
Accessory type:
Weight:
Min. temperature:
Max. temperature:
RoHS-compliant:

Pneumatic accessory
PKT
Pneumatic contact part
Plug socket (air shut-off)
Customising accessories
0.01 kg [.022 lbs]
10 °C [50 °F]
60 °C [140 °F]
Yes

Compatible with

Interface blocks (SB):

SB-T-PN-008-PK3-A

Technical data

Connection:
Compressed air connection:
Length:
Diameter:
Inner diameter:

PDS-4-075-PUN
PK-3
25.3 mm [.996 in]
8.3 mm [.326 in]
1.6 mm [.062 in]

Interface blocks

Part no.	Designation	Version
37820	SB-T-PN-008-PK3-A	Pneumatic block for test system side, 8 poles, compressed air block

INGUN Prüfmittelbau GmbH

Max-Stromeyer-Straße 162
78467, Constance, Germany
Phone +49 7531 8105-0
Customer hotline +49 7531 8105-888
Fax +49 7531 8105-65
info@ingun.com

