

Guide pin

FUS-08-24-38-ST-F-M4

Item 2230



GO TO PRODUCT



ingun[®]

Partner for Future Technology



- High-precision guiding pin
- Precise, low-friction contacting
- Centring accuracy of +/- 0.075 mm in combination with guide bush #2196
- Quick, easy installation

Application

Guide pins are used in combination with suitable guide bushes for precise, low-friction contacting. Primarily to minimise the transverse and torsional forces acting on the stroke movement and to ensure reliable and accurate contacting.

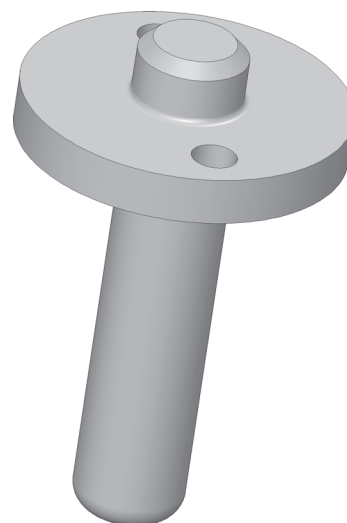

1:1

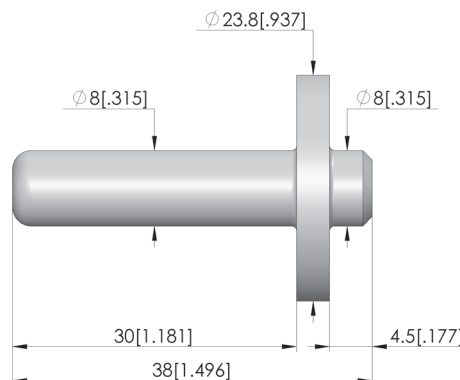

General data

Product group:

Series:

Type:

Version:

Accessory type:

Material:

Weight:

Min. temperature:

Max. temperature:

RoHS-compliant:

Mechanical accessory

FU

Guide pin

Flange

Customising accessories

1,07

0.02 kg [.044 lbs]

10 °C [50 °F]

60 °C [140 °F]

Yes

Compatible with

Vacuum test fixtures (VA):

VA 2070

Technical data

Installation:

Length:

Diameter:

Thread M4

38 mm [1.49 in]

8 mm [.314 in]

Accessories

Part no.	Designation	Version
2196	FUB-08-14-35-POM-BL-B	Guiding bush

INGUN Prüfmittelbau GmbH

Max-Stromeyer-Straße 162

78467, Constance, Germany

Phone +49 7531 8105-0

Customer hotline +49 7531 8105-888

Fax +49 7531 8105-65

info@ingun.com



Prices and delivery times on request.
Technical changes reserved. 11/25_GB