

# Test Probe

## GKS-051 204 051 A 2000

Item GKS-051-0014




GO TO PRODUCT

**ingun**<sup>®</sup>

Partner for Future Technology

- Inner conductor for RF test probes (HFS)
- Can be used for service or repair

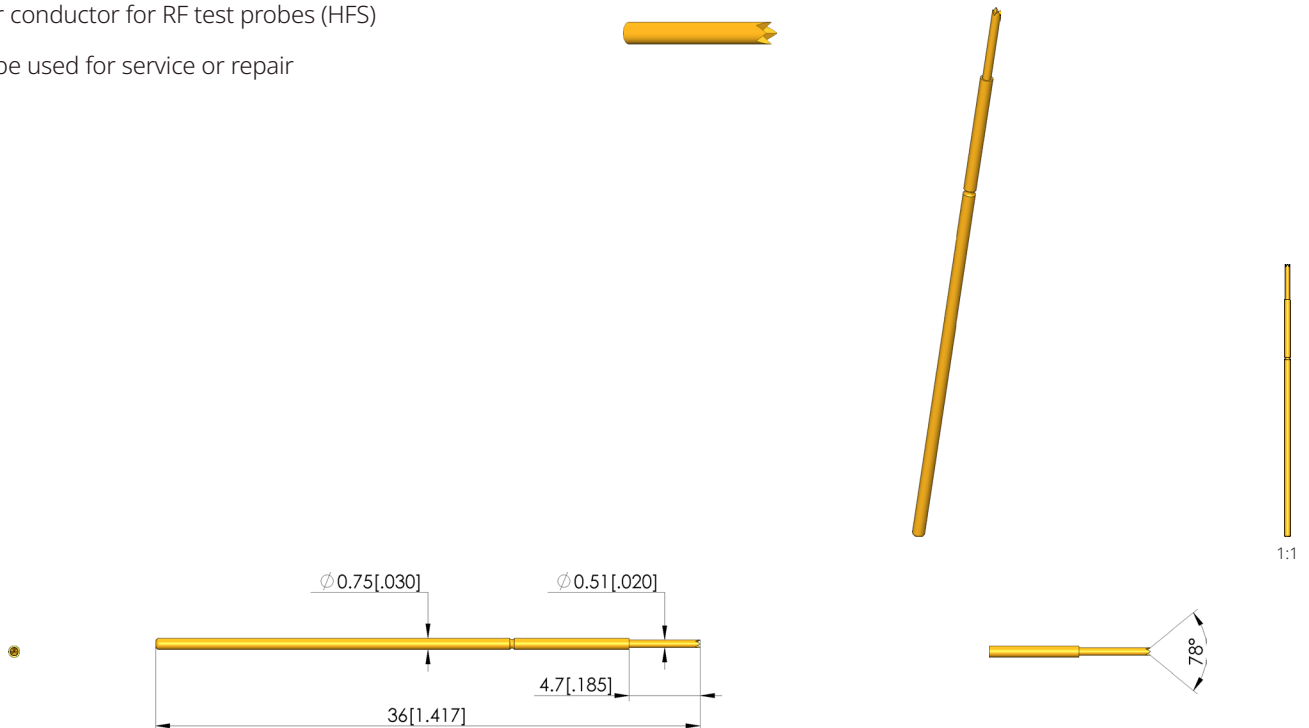

### General data

Product group:	Accessories (GKS / ADA)
Sub-product group:	RF inner conductor
Series:	GKS-051
Grid:	1.27 mm [50 mil]
Contacting from:	Pad
Magnetic:	Yes
Installation type:	Plug-in
Quick-exchange system:	Yes
Adjustable installation height:	No
Non-rotating:	No
Min. temperature:	-40 °C [-40 °F]
Max. temperature:	80 °C [176 °F]
RoHS-compliant:	Yes

### Tip style data

Tip style:	04 4-point crown
Tip diameter:	0.51 mm [.02 in]
Tip style surface:	A gold
Tip style material:	2 steel

### Electrical data

Current load capacity / rated current:	2 A
Typical resistance (Ri):	20 mOhm

### Mechanical data

Total length:	36 mm [1.41 in]
Barrel diameter:	0.75 mm [.029 in]
Maximum stroke:	3.7 mm [.145 in]
Spring pre-load:	1.07 N [3.84 ozf]
Collar height:	00
Spring force at working stroke:	2 N [7.19 ozf]
Recommended working stroke:	2 mm [.078 in]

Test Probe


**GKS-051 204 051 A 2000**

Item GKS-051-0014



**ingun**<sup>®</sup>

Partner for Future Technology

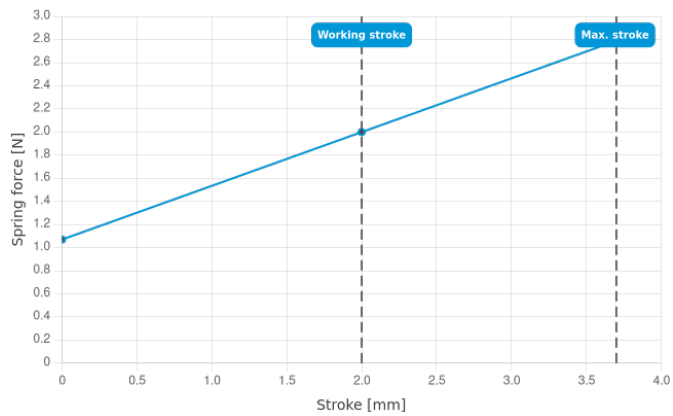

**INGUN Prüfmittelbau GmbH**

Max-Stromeyer-Straße 162  
78467, Constance, Germany  
Phone +49 7531 8105-0  
Customer hotline +49 7531 8105-888  
Fax +49 7531 8105-65  
info@ingun.com



Prices and delivery times on request.  
Technical changes reserved. 03/26\_GB

Learn more about  
**Test probes**

