

Receptacle

KS-100 47 25

Item KS-1004725




GO TO PRODUCT


ingun[®]

Partner for Future Technology

INGUN SELECTION



1:1

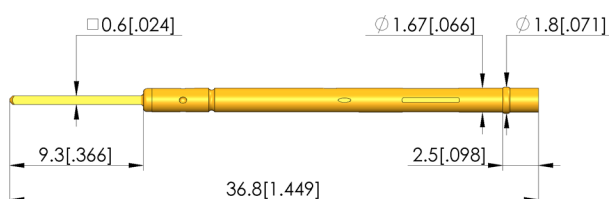

General data

Product group:
Series:
Sub-series:
Type of receptacle connection:
Press ring:
Surface area:
Collar diameter:
Collar height:
Wire-wrap post length:
Knurl:
Vacuum-tight:
RoHS-compliant:

Receptacles (KS)
KS-100
KS-100 press-in version
Wire-wrap
No
Gold
1.8 mm [.07 in]
2.5 mm [.098 in]
9.3 mm [.366 in]
No
yes (< 1 ccm / min)
Yes

Mechanical data

Total length:
Outer diameter:

36.8 mm [1.44 in]
1.67 mm [.065 in]

Mounting hole

Mounting hole in CEM1:
Mounting hole in FR4:

1.68 – 1.69 mm [.066 – .066 in]
1.69 – 1.7 mm [.066 – .066 in]

INGUN Prüfmittelbau GmbH

Max-Stromeyer-Straße 162
78467, Constance, Germany
Phone +49 7531 8105-0
Customer hotline +49 7531 8105-888
Fax +49 7531 8105-65
info@ingun.com



Prices and delivery times on request.
Technical changes reserved. 11/25_GB

Learn more about
Test probes



ingun.com