



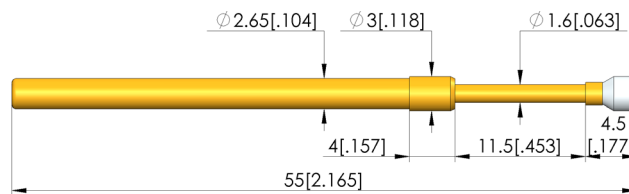

INGUN SELECTION



General data

Product group:
 Sub-product group:
 Series:
 Grid:
 Contacting from:
 Magnetic:
 Installation type:
 Quick-exchange system:
 Adjustable installation height:
 Non-rotating:
 Compatible receptacle(s):
 Min. temperature:
 Max. temperature:
 RoHS-compliant:

Accessories (GKS / ADA)
 PCB support pins
 GKS-416
 4 mm [157 mil]
 Presence check
 Yes
 Plug-in
 Yes
 No
 No
 KS-113 23
 -40 °C [-40 °F]
 80 °C [176 °F]
 Yes

Tip style data

Tip style:
 Tip diameter:
 Tip style surface:
 Tip style material:

002 flat, contact surface insulated
 3 mm [.118 in]
 A gold
 3 CuBe

Electrical data

Current load capacity / rated current:

0 A

Mechanical data

Total length: 55 mm [2.16 in]
 Barrel diameter: 2.65 mm [.104 in]
 Maximum stroke: 11.5 mm [.452 in]
 Spring pre-load: 1.23 N [4.42 ozf]
 Collar height: 04
 Spring force at working stroke: 5 N [17.9 ozf]
 Recommended working stroke: 9.2 mm [.362 in]

Test Probe


GKS-416 002 300 A 5004

Item GKS-416-0002



ingun[®]

Partner for Future Technology

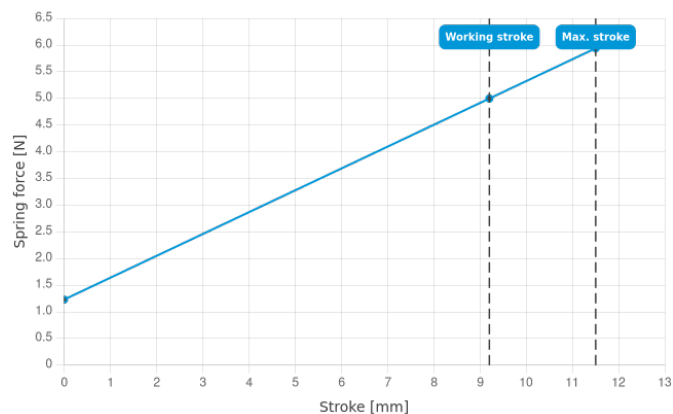

INGUN Prüfmittelbau GmbH

Max-Stromeyer-Straße 162
78467, Constance, Germany
Phone +49 7531 8105-0
Customer hotline +49 7531 8105-888
Fax +49 7531 8105-65
info@ingun.com



Prices and delivery times on request.
Technical changes reserved. 12/25_GB

Learn more about
Test probes

