

Connector - SUBD

STV-SUBD-F-009-WW-G13






Item 29629



ingun[®]

Partner for Future Technology

- Sub-D plug connector socket
- Table installation possible.
- 9-pole, 2.74 mm grid, wire-wrap connection

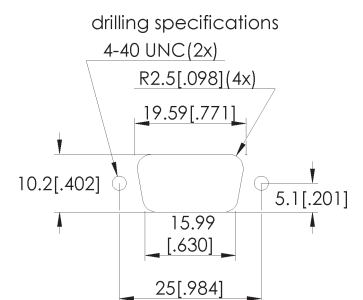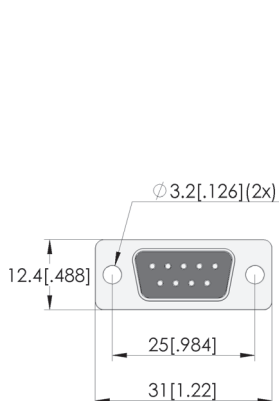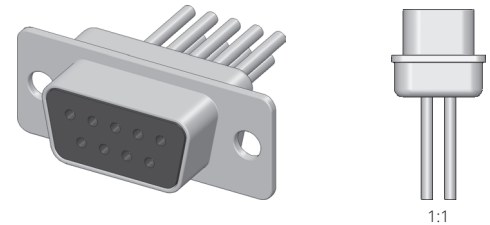

General data

Product group:
Series:
Type:
Version:
Accessory type:
Component assembly:
Material:
Width:
Height:
Weight:
Min. temperature:
Max. temperature:
RoHS-compliant:

Electric accessory
STV
Mounting socket
SUB-D
Customising accessories
Metal
25 mm [.984 in]
12.4 mm [.488 in]
0.01 kg [.022 lbs]
-55 °C [-67 °F]
125 °C [257 °F]
Yes

Compatible with

Interface blocks (SB):

SB-P-SO-009-SUB-D

Technical data

Connection:
Current rating:
Installation:
Max. voltage:
Number of poles:
Installation grid:
Length:
Outer dimensionS (WxDxH):

Wire-wrap posts
7 A
Bore D = 3.1 mm
9
2.74 mm [.107 in]
31 mm [1.22 in]
31 x 12.4 x 25 mm [1.22 x .488 x .984 in]

INGUN Prüfmittelbau GmbH

Max-Stromeyer-Straße 162
78467, Constance, Germany
Phone +49 7531 8105-0
Customer hotline +49 7531 8105-888
Fax +49 7531 8105-65
info@ingun.com



Prices and delivery times on request.
Technical changes reserved. 11/25_GB