

Interface support

SSA-TSO5x-VA4060

Item 113536




ingun[®]

Partner for Future Technology

- Interface support für TERADYNE TSO5x interface
- Ideally designed for VA 4060 test fixtures
- Quick, easy installation on the bottom of the test fixture
- Reliable connection from test fixture to system interface

Application

The interface frame (SSA) is used for reliable connection of the interface (SST) to the test fixture.

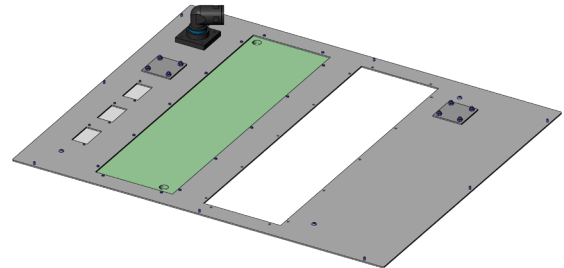

General data

Product group:

Series:

Type:

Version:

Accessory type:

Scope of delivery:

Width:

Height:

Weight:

Min. temperature:

Max. temperature:

RoHS-compliant:

Housing

SSA-VAXxxx

TSO5x (Teradyne)

VA 4060

Additional function

Unassembled

538 mm [21.1 in]

70.5 mm [2.77 in]

2.1 kg [4.62 lbs]

10 °C [50 °F]

60 °C [140 °F]

Yes

Compatible with

Vacuum test fixtures (VA):

Accessories:

VA 4060

SST-TSO5x-2560

Technical data

Length:

646 mm [25.4 in]

Outer dimensionS (WxDxH): 646 x 538 x 70.5 mm [25.4 x 21.1 x 2.77 in]

INGUN Prüfmittelbau GmbH

Max-Stromeyer-Straße 162

78467, Constance, Germany

Phone +49 7531 8105-0

Customer hotline +49 7531 8105-888

Fax +49 7531 8105-65

info@ingun.com



Learn more about
Test fixture kits

