

Receptacle KS-005 30 G


Item KS-00530G




GO TO PRODUCT

ingun[®]

Partner for Future Technology

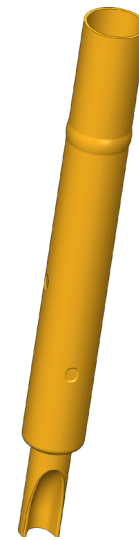

1:1

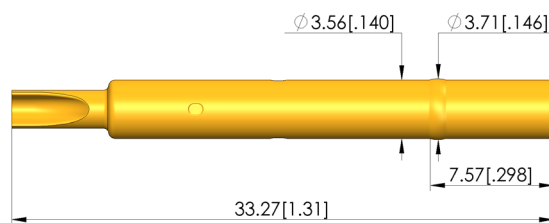

General data

Product group:
Series:
Sub-series:
Type of receptacle connection:
Press ring:
Surface area:
Collar diameter:
Collar height:
Knurl:
Vacuum-tight:
RoHS-compliant:

Receptacles (KS)
KS-005
KS-005 press-in version
Solder
Yes
Gold
3.66 mm [.144 in]
7.6 mm [.299 in]
No
No
Yes

Mechanical data

Total length: 33.3 mm [1.31 in]
Outer diameter: 3.56 mm [.14 in]

Mounting hole

Mounting hole in CEM1: 3.53 – 3.54 mm [.138 – .139 in]
Mounting hole in FR4: 3.53 – 3.54 mm [.138 – .139 in]
Mounting hole with press ring in CEM1: 3.58 – 3.63 mm [.14 – .142 in]
Mounting hole with press ring in FR4: 3.58 – 3.63 mm [.14 – .142 in]

INGUN Prüfmittelbau GmbH

Max-Stromeyer-Straße 162
78467, Constance, Germany
Phone +49 7531 8105-0
Customer hotline +49 7531 8105-888
Fax +49 7531 8105-65
info@ingun.com



Prices and delivery times on request.
Technical changes reserved. 03/26_GB

Learn more about
Test probes

