

Interface support

SSA-88xx-M-VA4060

Item 113533



GO TO PRODUCT


ingun[®]

Partner for Future Technology

- Interface support für TERADYNE 88xx-M (Spectrum) interface
- Ideally designed for VA 4060 test fixtures
- Quick, easy installation on the bottom of the test fixture
- Reliable connection from test fixture to system interface

Application

The interface frame (SSA) is used for reliable connection of the interface (SST) to the test fixture.

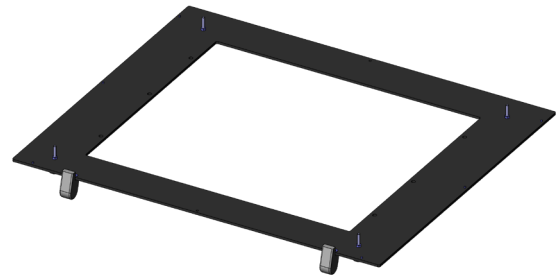

General data

Product group:

Series:

Type:

Version:

Accessory type:

Scope of delivery:

Width:

Height:

Weight:

Min. temperature:

Max. temperature:

RoHS-compliant:

Housing

SSA-VAxxxx

88xx-M (Teradyne)

VA 4060

Additional function

Unassembled

556 mm [21.8 in]

45.8 mm [1.8 in]

1.2 kg [2.64 lbs]

10 °C [50 °F]

60 °C [140 °F]

Yes

Compatible with

Vacuum test fixtures (VA):

Accessories:

VA 4060

SST-88xx-M

Technical data

Length:

646 mm [25.4 in]

Outer dimensionS (WxDxH): 646 x 556 x 45.8 mm [25.4 x 21.8 x 1.8 in]

INGUN Prüfmittelbau GmbH

Max-Stromeyer-Straße 162

78467, Constance, Germany

Phone +49 7531 8105-0

Customer hotline +49 7531 8105-888

Fax +49 7531 8105-65

info@ingun.com



Prices and delivery times on request.
Technical changes reserved. 11/25_GB

Learn more about
Test fixture kits

