





GO TO PRODUCT

- Plug or cable assemblies for RF test probes (HFS)

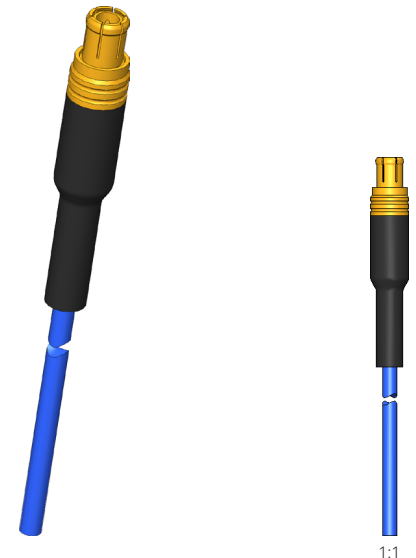

1:1

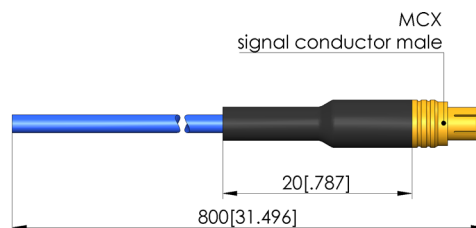

General data

Product group:

Series:

Sub-series:

Min. temperature:

Max. temperature:

RoHS-compliant:

Electrical data

Maximum frequency:

Impedance:

Cable shielding:

Maximum performance:

Performance coefficient:

Dielectric strength:

Attenuation coefficient a:

Attenuation coefficient b:

Assemblies

SE-EF178

SE-EF178 plug

-40 °C [-40 °F]

105 °C [221 °F]

Yes

3 GHz

50 Ohm

Simple

35 W

60 EF178

.75 kV

1,40670 EF178

0,22290 EF178

Cable data

Cable length:

Cable type:

Kink protection cable:

Attenuation Fmax:

Connector data

Interface 1:

Interface gender 1:

Version 1:

Interface 2:

800 mm [31.4 in]

Shrink-on sleeve, black, 20 mm

2.48 dB

MCX

M signal conductor male / plug

Straight

Open cable end

INGUN Prüfmittelbau GmbH

Max-Stromeyer-Straße 162

78467, Constance, Germany

Phone +49 7531 8105-0

Customer hotline +49 7531 8105-888

Fax +49 7531 8105-65

info@ingun.com



Learn more about
Test probes

