




GO TO PRODUCT

- Component for the Opens test, for capacitive testing of semiconductor chips for open circuits, short circuits and soldering faults
- Suitable for Digitaltest test systems

### Application



The OpensCheck electronics board is used for capacitive testing of integrated circuits to check the wire-bonded connections inside an integrated circuit for open circuits, short circuits and soldering faults.

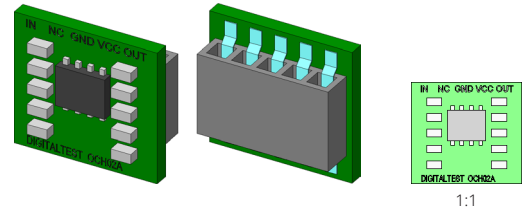

1:1

### Scope of delivery

Electronic plate OCH 02



### General data

Product group:	Opens tests
Series:	OTC
Type:	Digitaltest opens test
Version:	Opens Check
Accessory type:	Customising accessories
Scope of delivery:	Electronic plate
Width:	13.2 mm [.519 in]
Height:	5.9 mm [.232 in]
Weight:	0.01 kg [.022 lbs]
Min. temperature:	10 °C [50 °F]
Max. temperature:	60 °C [140 °F]
RoHS-compliant:	Yes

### Compatible with

Vacuum test fixtures (VA): VA xxxx/MTSxxx

### Technical data

Length: 14.5 mm [.57 in]  
 Outer dimensionS (WxDxH): 13.2 x 14.5 x 5.9 mm [.519 x .57 x .232 in]

OpensCheck Buffer OCH 02

**OTC-DT-OC-EP**


Item 18746



GO TO PRODUCT

**ingun**<sup>®</sup>

Partner for Future Technology



**INGUN Prüfmittelbau GmbH**

Max-Stromeyer-Straße 162  
78467, Constance, Germany  
Phone +49 7531 8105-0  
Customer hotline +49 7531 8105-888  
Fax +49 7531 8105-65  
info@ingun.com



Prices and delivery times on request.  
Technical changes reserved. 04/26\_GB