







Prüfung von Kabelschuhen

zur Überprüfung von Steckverbindern mit geometrisch eindeutig ausgerichteten Kontaktterminals



1:1

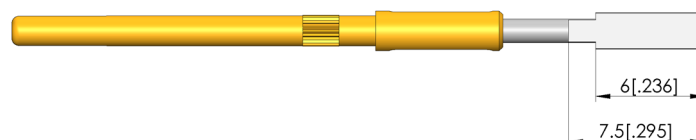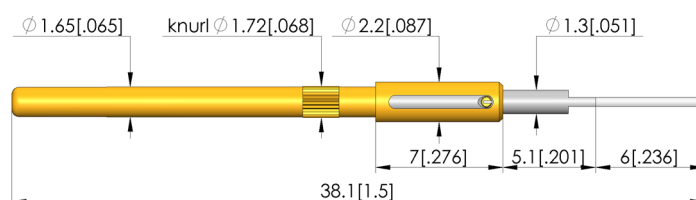

General data

Product group:
Sub-product group:
Series:
Grid:
Contacting from:
Magnetic:
Installation type:
Quick-exchange system:
Adjustable installation height:
Non-rotating:
Min. temperature:
Max. temperature:
RoHS-compliant:

Screw-in test probe
Non-rotating test probes
GKS-710
2.54 mm [100 mil]
Female connector
Yes
Plug-in
No
No
Yes
-40 °C [-40 °F]
80 °C [176 °F]
Yes

Tip style data

Tip style: 20 spade, flat, bevelled, self-cleaning
Tip diameter: 2 mm [.078 in]
Tip style surface: R rhodium
Tip style material: 2 steel
Spade width: 0.5 mm [.019 in]
Spade length: 7.5 mm [.295 in]

Electrical data

Current load capacity / rated current: 5 A
Typical resistance (Ri): 30 mOhm

Mechanical data

Total length: 38.1 mm [1.5 in]
Barrel diameter: 1.65 mm [.064 in]
Maximum stroke: 5 mm [.196 in]
Spring pre-load: 0.24 N [.863 ozf]
Collar height: 07
Spring force at working stroke: 1.5 N [5.39 ozf]
Recommended working stroke: 4 mm [.157 in]

Test Probe


GKS-710 220 050 R 1507

Item GKS-710-0004



ingun[®]

Partner for Future Technology

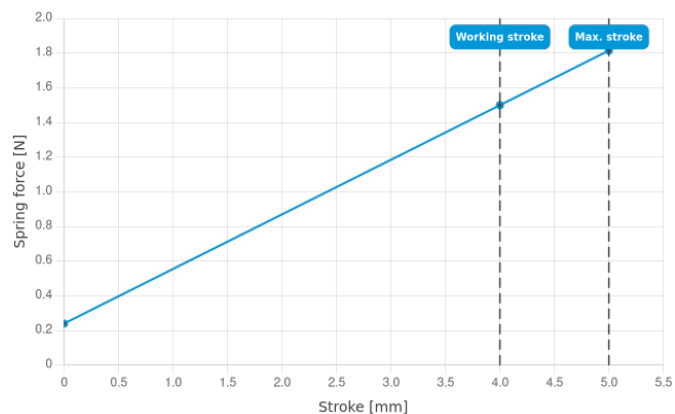

INGUN Prüfmittelbau GmbH

Max-Stromeyer-Straße 162
78467, Constance, Germany
Phone +49 7531 8105-0
Customer hotline +49 7531 8105-888
Fax +49 7531 8105-65
info@ingun.com



Prices and delivery times on request.
Technical changes reserved. 12/25_GB

Learn more about
Screw-in test probe



SCREW-IN TEST PROBE

ingun.com