

Adapter, coaxial HFS-ADA-MCX-M-SMA-F

Item HFS-ADA-MCX-M-SMA-F



GO TO PRODUCT



ingun[®]

Partner for Future Technology




Radio-frequency interface

For adapting the interface of radio-frequency probes

- To adapt the interface of radio-frequency probes in the HFS-810, HFS-840, HFS-860, HFS-410 and HFS-440 series.

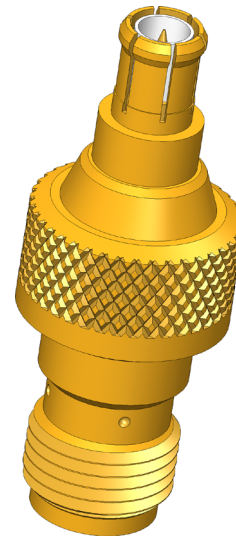

1:1

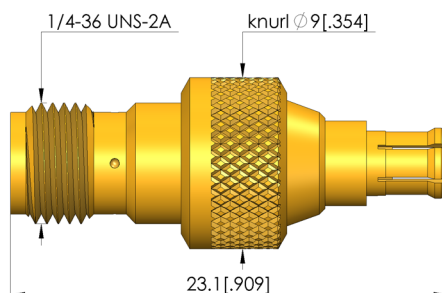

General data

Product group:
Series:
Sub-series:
Min. temperature:
Max. temperature:
RoHS-compliant:

Test fixture (HFS-ADA)
RF ADA fixture
RF ADA fixture
-55 °C [-67 °F]
125 °C [257 °F]
Yes

Connector data

Interface 1:
Interface gender 1:
Version 1:
Interface 2:
Interface gender 2:
Version 2:
Moment interface 2:

MCX
M signal conductor male / plug
Straight
SMA
F signal conductor female / socket
Straight
45 cNm [3.98 lbf·in]

Electrical data

Maximum frequency:
Impedance:

6 GHz
50 Ohm

INGUN Prüfmittelbau GmbH

Max-Stromeyer-Straße 162
78467, Constance, Germany
Phone +49 7531 8105-0
Customer hotline +49 7531 8105-888
Fax +49 7531 8105-65
info@ingun.com



Prices and delivery times on request.
Technical changes reserved. 12/25_GB

Learn more about
Test probes



ingun.com