

High-Current Clip

VKF-618 06308 050 S 2014-14W1

Item VKF-618-0001



GO TO PRODUCT


ingun[®]

Partner for Future Technology


- Four-wire measurement
- For flat connector blades
- DUT thickness 0.8 mm (± 0.1 mm)
- Suitable contact receptacle with anti-rotation lock is KS-624 M5 M5-RF-S

INGUN SELECTION


NEW

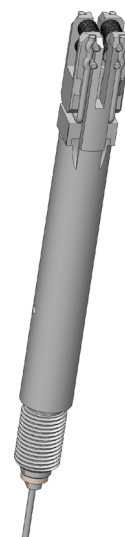

1:1

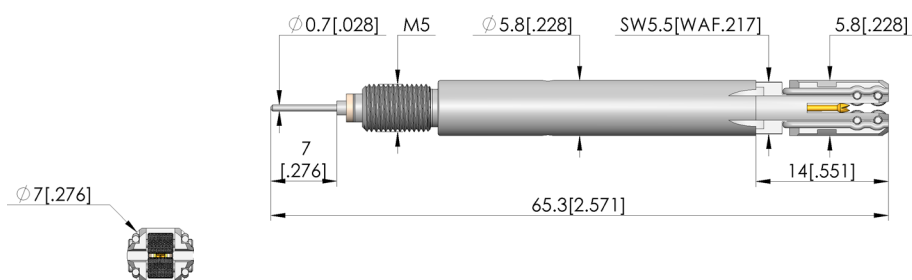

Example of contact at working stroke



General data

Screw-in torque max.:	40 cNm [3.54 lbf-in]
Product group:	Clamp contact, flat, dipole
Sub-product group:	Clamp contact, flat, dipole
Series:	VKF-618 M screw-in
Grid:	7.6 mm [299 mil]
Contacting from:	Pad
Magnetic:	Yes
Installation type:	Screw-in
Quick-exchange system:	No
Adjustable installation height:	No
Non-rotating:	No
Screw-in torque:	40 cNm [3.54 lbf-in]
Compatible receptacle(s):	
Min. temperature:	-100 °C [-148 °F]
Max. temperature:	200 °C [392 °F]
RoHS-compliant:	Yes

Tip style data

Tip style:	14 4-point crown, self-cleaning
Tip diameter:	7 mm [.275 in]
Tip style surface:	S silver
Tip style material:	2 steel

Electrical data

Current load capacity / rated current:	100 A
--	-------

Mechanical data

Total length:	65.3 mm [2.57 in]
Barrel diameter:	5.8 mm [.228 in]
Maximum stroke:	5.5 mm [.216 in]
Spring pre-load:	0.77 N [2.76 ozf]
Collar height:	14
Spring force at working stroke:	2 N [7.19 ozf]
Recommended working stroke:	4.5 mm [1.77 in]

HIGH-CURRENT TEST PROBES

High-Current Clip






VKF-618 06308 050 S 2014-14W1

Item VKF-618-0001



ingun[®]

Partner for Future Technology

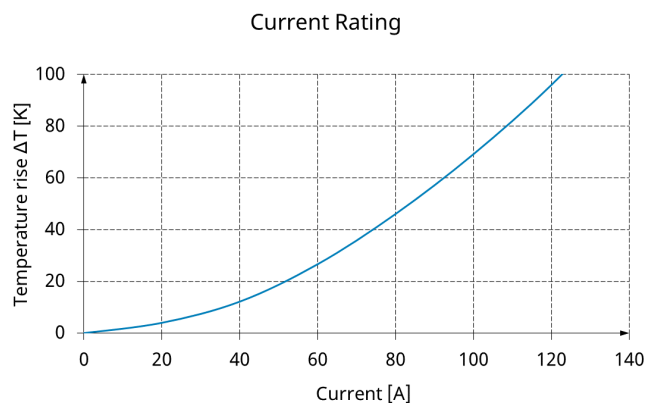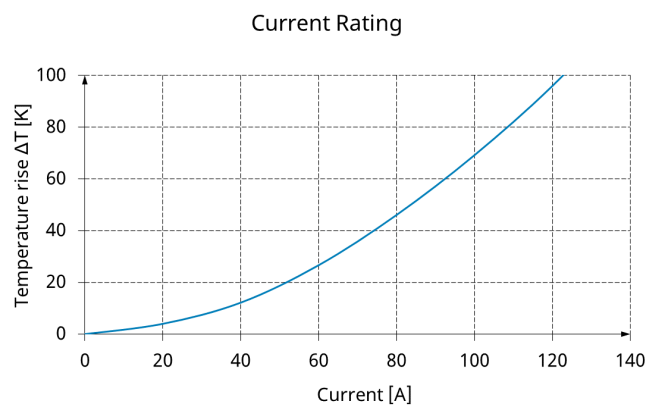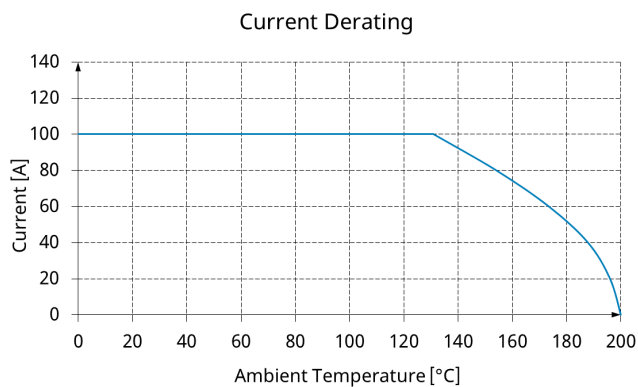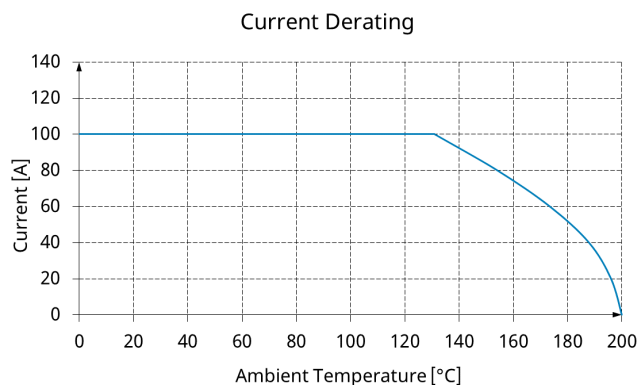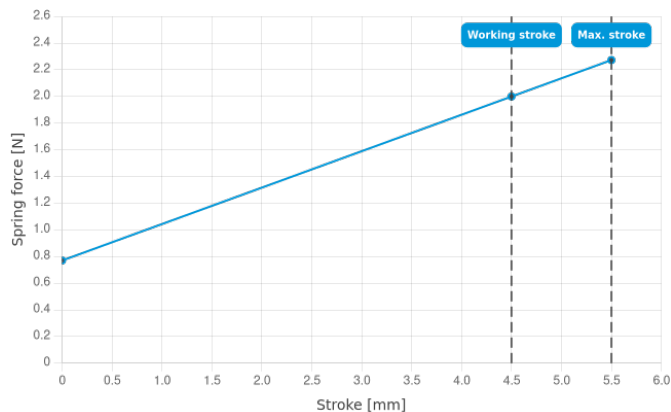

INGUN Prüfmittelbau GmbH

Max-Stromeyer-Straße 162
78467, Constance, Germany
Phone +49 7531 8105-0
Customer hotline +49 7531 8105-888
Fax +49 7531 8105-65
info@ingun.com



Prices and delivery times on request.
Technical changes reserved. 12/25_GB

Learn more about
High-current test probes



ingun.com