

Stroke Measurement Probe

HMS-422 306 200 A


Item HMS-422-0002



GO TO PRODUCT

ingun[®]

Partner for Future Technology

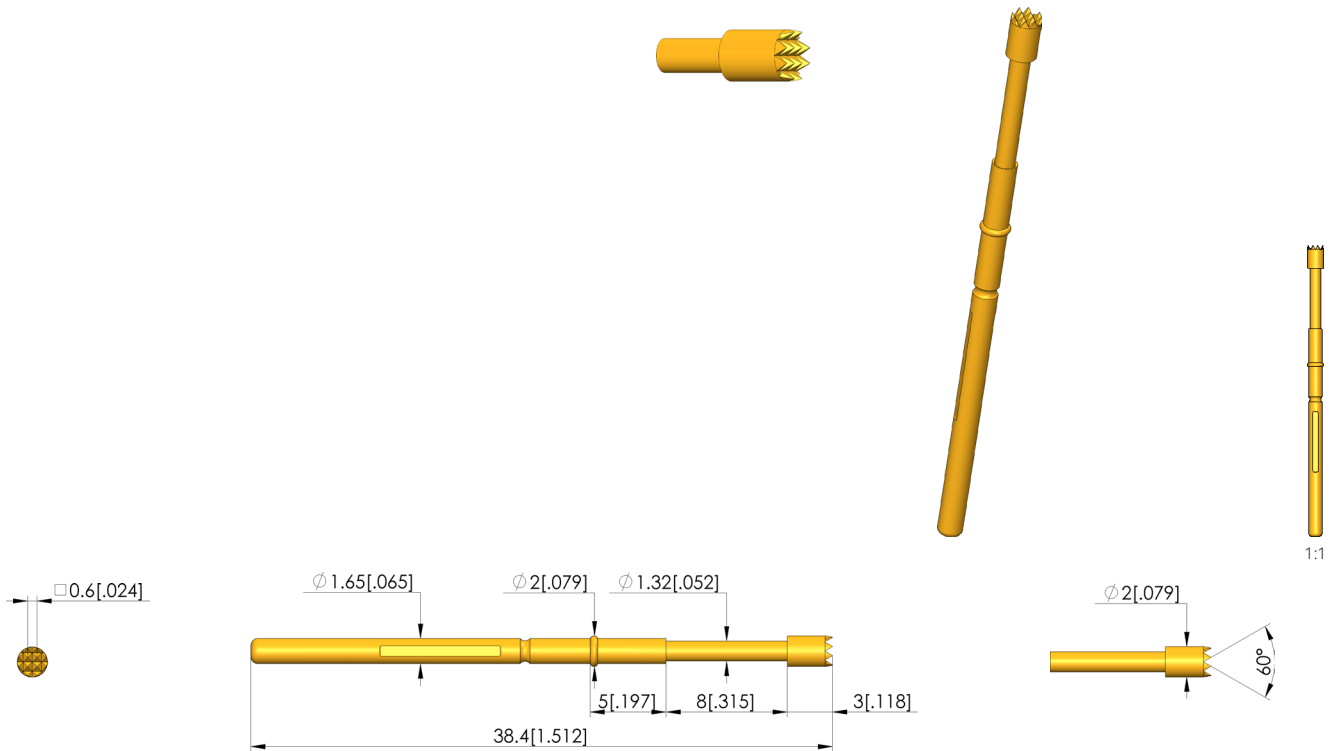

General data

Product group: Accessories (GKS / ADA)
Sub-product group: Stroke-measuring probe
Series: HMS-422
Grid: 2.54 mm [100 mil]
Contacting from: Post
Magnetic: Yes
Installation type: Plug-in
Quick-exchange system: Yes
Adjustable installation height: No
Non-rotating: No
Compatible receptacle(s): KS-112
Min. temperature: -40 °C [-40 °F]
Max. temperature: 80 °C [176 °F]
RoHS-compliant: Yes

Accessories (GKS / ADA)
Stroke-measuring probe
HMS-422
2.54 mm [100 mil]
Post
Yes
Plug-in
Yes
No
No
KS-112
-40 °C [-40 °F]
80 °C [176 °F]
Yes

Tip style data

Tip style: 06 serrated
Tip diameter: 2 mm [0.079 in]
Tip style surface: A gold
Tip style material: 3 CuBe

Mechanical data

Total length: 38.4 mm [1.51 in]
Barrel diameter: 1.65 mm [0.064 in]
Maximum stroke: 8 mm [0.314 in]
Collar height: 05
Recommended working stroke: 6.4 mm [0.251 in]

INGUN Prüfmittelbau GmbH

Max-Stromeyer-Straße 162
78467, Constance, Germany
Phone +49 7531 8105-0
Customer hotline +49 7531 8105-888
Fax +49 7531 8105-65
info@ingun.com



Prices and delivery times on request.
Technical changes reserved. 03/26_GB

Learn more about
Test probes



ingun.com