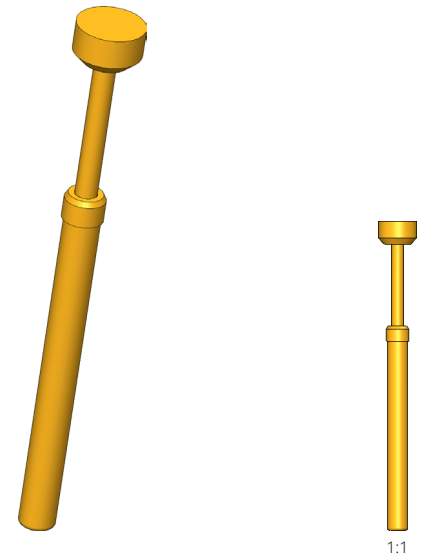


General data

Product group:
Sub-product group:
Series:
Grid:
Contacting from:
Magnetic:
Installation type:
Quick-exchange system:
Adjustable installation height:
Non-rotating:
Compatible receptacle(s):
Min. temperature:
Max. temperature:
RoHS-compliant:

ESD discharge
ESD discharge
GKS-414
5.5 mm [216 mil]
Post
Yes
Plug-in
Yes
No
No
KS-113
-40 °C [-40 °F]
80 °C [176 °F]
Yes

Tip style data

Tip style:
Tip diameter:
Tip style surface:
Tip style material:

02 flat
5 mm [.196 in]
A gold
2 steel

Electrical data

Current load capacity / rated current:
Typical resistance (Ri):

5 A
30 mOhm

Mechanical data

Total length:
Barrel diameter:
Maximum stroke:
Spring pre-load:
Collar height:
Spring force at working stroke:
Recommended working stroke:

40.8 mm [1.6 in]
2.65 mm [.104 in]
10.8 mm [.425 in]
0.26 N [.935 ozf]
02
1.5 N [5.39 ozf]
9.6 mm [.377 in]

Test Probe


GKS-414 202 500 A 1502

Item GKS-414-0007



ingun[®]

Partner for Future Technology

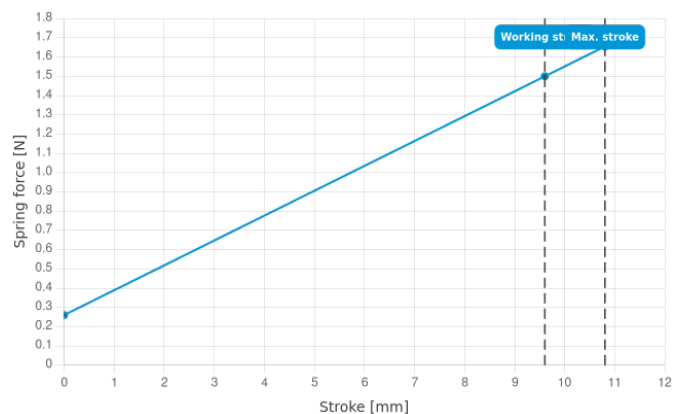

INGUN Prüfmittelbau GmbH

Max-Stromeyer-Straße 162
78467, Constance, Germany
Phone +49 7531 8105-0
Customer hotline +49 7531 8105-888
Fax +49 7531 8105-65
info@ingun.com



Prices and delivery times on request.
Technical changes reserved. 12/25_GB

Learn more about
Test probes

