

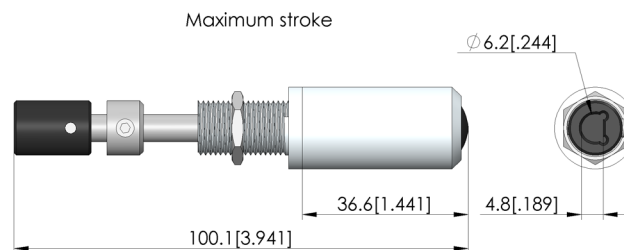


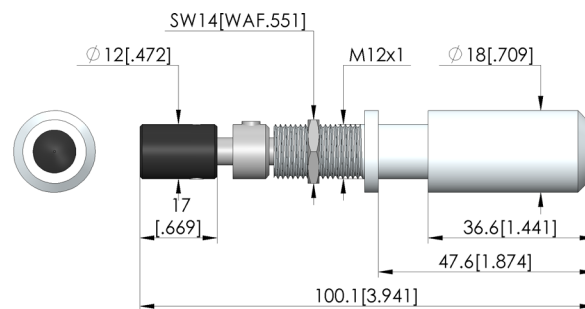

- For setting rotatable adjustable potentiometers during the test
- Space-saving, quick, easy installation
- Manual actuation

Application

With screwing units (SBE), space-saving alignment of adjustable screw-in devices can be performed during testing. Operation is manual. Screwing units are typically mounted in the pressure frame plate.

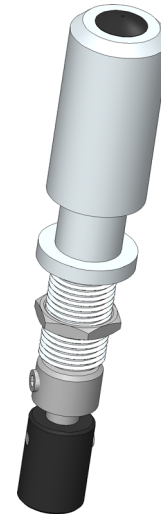

Screwing unit

SBE-M-18-11-6,2SW4,8-VD

Item 40666



GO TO PRODUCT

ingun[®]

Partner for Future Technology

General data

Product group:

Series:

Type:

Version:

Accessory type:

Scope of delivery:

Material:

Colour:

Min. temperature:

Max. temperature:

RoHS-compliant:

Screwing units

SBE

Manual, vacuum-tight

Customising accessories

Incl. round bit

POM

White

10 °C [50 °F]

60 °C [140 °F]

Yes

Compatible with

Manual test fixtures (MA):

Vacuum test fixtures (VA):

MA exchangeable kits (ATS MA):

PA exchangeable kits (ATS PA):

For dual-stage contacting:

MA 2012

VA 30xx

ATS MAxx

ATS PAZxxx

Yes

Technical data

Stroke:

Tip diameter:

Installation grid:

Blade dimensions (WxD):

Length:

Diameter:

11 mm [.433 in]

18 mm [.708 in]

18 mm [.708 in]

6.2 x 4.8 mm [.244 x .188 in]

100 mm [3.94 in]

18 mm [.708 in]

INGUN Prüfmittelbau GmbH

Max-Stromeyer-Straße 162

78467, Constance, Germany

Phone +49 7531 8105-0

Customer hotline +49 7531 8105-888

Fax +49 7531 8105-65

info@ingun.com

