





Verrastprüfung

Zur Überprüfung der korrekten Verrastung des Kontaktterminals im Steckergehäuse

INGUN SELECTION

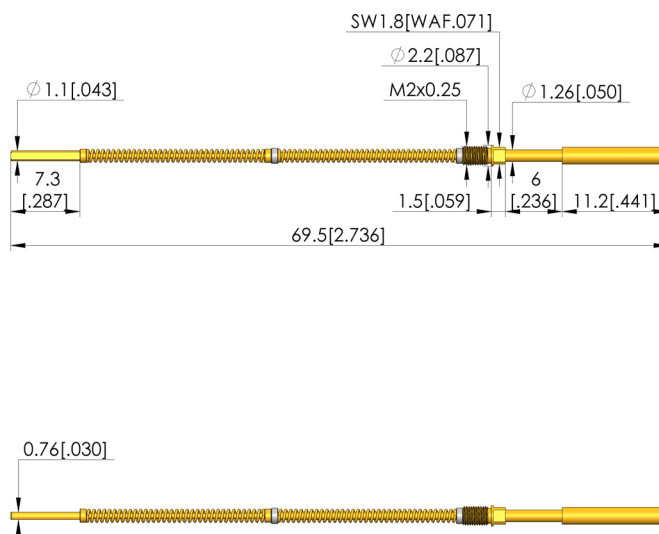

General data

Screw-in torque max.:
 Product group:
 Sub-product group:
 Series:
 Grid:
 Contacting from:
 Magnetic:
 Installation type:
 Quick-exchange system:
 Adjustable installation height:
 Non-rotating:
 Continuous plunger:
 Screw-in torque:
 Compatible receptacle(s):
 Min. temperature:
 Max. temperature:
 RoHS-compliant:

5 cNm [.442 lbf-in]
 Push-back probes
 Push-back probes
 VF100 screw-in
 2.54 mm [100 mil]
 Post
 Yes
 Screw-in
 Yes
 No
 Yes
 $\phi 1,1 \times 0,77 \times 7,3$
 3 – 5 cNm [.265 – .442 lbf-in]
 KS-VF100
 -40 °C [-40 °F]
 80 °C [176 °F]
 Yes

Tip style data

Tip style:
 Tip diameter:
 Tip style surface:
 Tip style material:
 Step probe tip height:

02 flat
 1.8 mm [.07 in]
 A gold
 2 steel
 11.2 mm [.44 in]

Electrical data

Current load capacity / rated current:
 Typical resistance (Ri):

5 A
 50 mOhm

Mechanical data

Total length:
 Maximum stroke:
 Spring pre-load:
 Spring force at working stroke:
 Recommended working stroke:

69.5 mm [2.73 in]
 5.5 mm [.216 in]
 1.73 N [6.22 ozf]
 15 N [53.9 ozf]
 5 mm [.196 in]

Test Probe


VF100-202 180 A 150

Item VF100-0004



ingun[®]

Partner for Future Technology

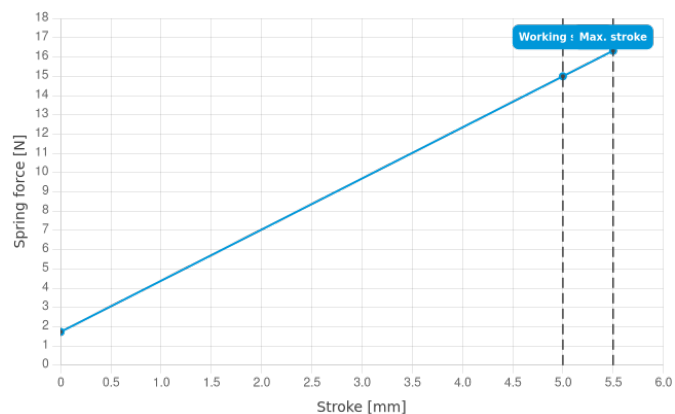

INGUN Prüfmittelbau GmbH

Max-Stromeyer-Straße 162
78467, Constance, Germany
Phone +49 7531 8105-0
Customer hotline +49 7531 8105-888
Fax +49 7531 8105-65
info@ingun.com



Prices and delivery times on request.
Technical changes reserved. 11/25_GB

Learn more about
Screw-in test probe



[ingun.com](https://www.ingun.com)

SCREW-IN TEST PROBE