

Test Probe GKS-912 006 230 A 1503





Item GKS-912-1882



GO TO PRODUCT

ingun[®]
Partner for Future Technology

- Robust test probes with distinctive collar (stop) on the barrel
- Optimum adjustment of the stroke ratios in the test fixture: The collar is available in different heights, which, in combination with the receptacles, allows a range of installation heights
- Version with central beading ensure low wobble for contacting small test points
- Stainless steel versions for temperatures from -100 °C up to +200 °C available

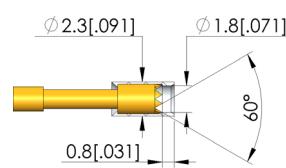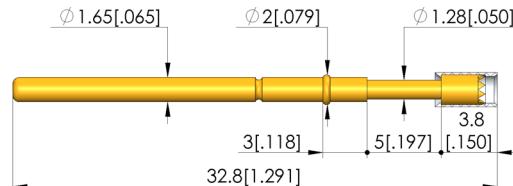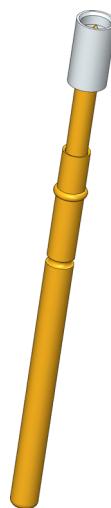

General data

Product group: ICT / FCT (in-circuit test and function test)
Sub-product group: Metric standard
Series: GKS-912
Grid: 2.54 mm [100 mil]
Contacting from: Post
Magnetic: Yes
Installation type: Plug-in
Quick-exchange system: Yes
Adjustable installation height: No
Non-rotating: No
Compatible receptacle(s): KS-112
Min. temperature: -40 °C [-40 °F]
Max. temperature: 80 °C [176 °F]
RoHS-compliant: Yes

ICT / FCT (in-circuit test and function test)

Metric standard

GKS-912

2.54 mm [100 mil]

Post

Yes

Plug-in

Yes

Quick-exchange system:

No

Adjustable installation height:
Non-rotating:
Compatible receptacle(s):
Min. temperature:
Max. temperature:
RoHS-compliant:

Tip style data

Tip style: 006 serrated, outer-ø insulated
Tip diameter: 2.3 mm [.09 in]
Tip style surface: A gold
Tip style material: 0 plastic

006 serrated, outer-ø insulated
2.3 mm [.09 in]
A gold
0 plastic

Electrical data

Current load capacity / rated current: 5 A
Typical resistance (R_i): 20 mOhm

Mechanical data

Total length: 32.8 mm [1.29 in]
Barrel diameter: 1.66 mm [.065 in]
Maximum stroke: 5 mm [.196 in]
Spring pre-load: 0.5 N [1.79 ozf]
Collar height: 03
Spring force at working stroke: 1.5 N [5.39 ozf]
Recommended working stroke: 4 mm [.157 in]


Test Probe GKS-912 006 230 A 1503

Item GKS-912-1882



GO TO PRODUCT

ingun[®]
Partner for Future Technology

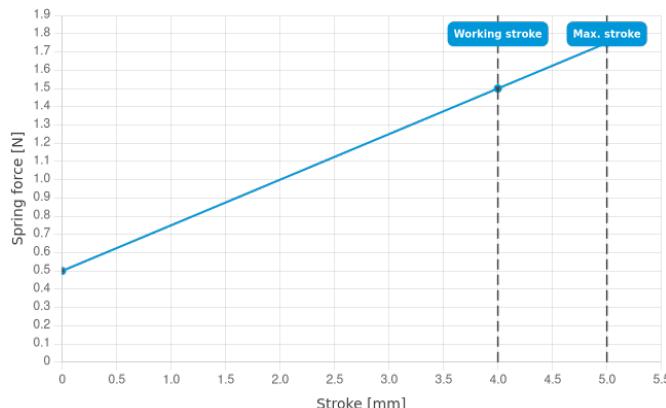

INGUN Prüfmittelbau GmbH

Max-Stromeyer-Straße 162
78467, Constance, Germany
Phone +49 7531 8105-0
Customer hotline +49 7531 8105-888
Fax +49 7531 8105-65
info@ingun.com



Prices and delivery times on request.
Technical changes reserved. 12/25_GB

2 / 2

Learn more about
ICT/FCT Test probes



ingun.com