

Pneumatic magnet valve

PMV-MO5/2-QS4-24V-SET

Item 42702



GO TO PRODUCT

ingun[®]

Partner for Future Technology



- Precise control of compressed air
- Quick reaction times thanks to combination of electronic activation and mechanical movement
- Reliable and durable, even under harsh conditions.
- Compact design, ideal for use in limited spaces

Application

Pneumatic solenoid valves are used to control pneumatic drives in order to regulate or stop the flow of the required compressed air.

Function

Pneumatic solenoid valves consist of a solenoid coil system and a valve mechanism. Applying voltage to the solenoid coil generates a magnetic field that actuates the valve mechanism. This controls the air flow.

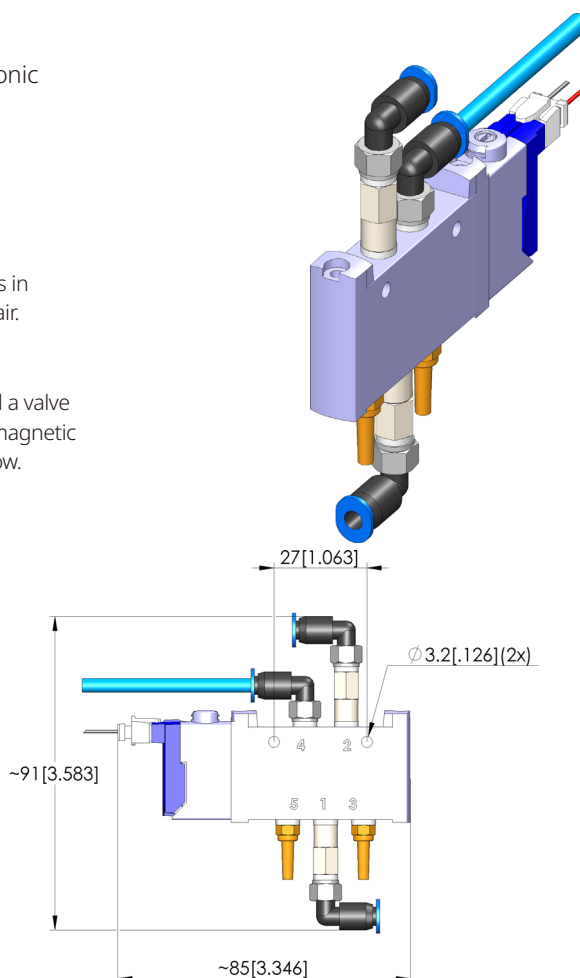

General data

Product group:
Series:
Type:
Version:
Accessory type:
Scope of delivery:
Material:
Width:
Height:
Weight:
Min. temperature:
Max. temperature:
RoHS-compliant:

Pneumatic accessory
PMV
Magnet valve, set
5/2 monostable, open
Customising accessories
Incl. connector accessories
Aluminium alloy
10 mm [.393 in]
91 mm [3.58 in]
0.04 kg [.088 lbs]
-5 °C [23 °F]
60 °C [140 °F]
Yes

Compatible with

Accessories:

FB-SOP

Technical data

Installation:
Max. voltage:
Number of poles:
Compressed air connection:
Rated flow:
Length:
Cable length:
Outer dimensionS (WxDxH):

Bore D = 3.2 mm
24 VDC
5
QS-4
90 l/min [23.7 gal/min]
85 mm [3.34 in]
500 mm [19.6 in]
85 x 10 x 91 mm [3.34 x .393 x 3.58 in]

INGUN Prüfmittelbau GmbH

Max-Stromeyer-Straße 162
78467, Constance, Germany
Phone +49 7531 8105-0
Customer hotline +49 7531 8105-888
Fax +49 7531 8105-65
info@ingun.com



Prices and delivery times on request.
Technical changes reserved. 11/25_GB