

Interface block SB-T-SI-170-4A-N-Z

产品 38694



直接访问产品

ingun®

Partner for Future Technology


- 配备 INGUN 探针
- 统一的平行绕线柱
- 可用于带有内部或外部 Pylon 接口的所有测试治具
- 恒定的低过渡电阻以及可重复的测量值
- 高触探可靠性和传输质量
- 过程可靠的低压信号传输
- 预组装插排作为接口配件

使用

Interface blocks (SB) are used to reliably transmit signals between test device and test system in internal and external Pylon interfaces. Signal blocks are suitable for the reliable transmission of low-voltage signals and hazardous voltages within the scope of their specification.

信号传输 (Signalübertragung)



信号通过两个相对的接口模块传输，其安装表面之间的工作距离为 15.1 ± 0.5 mm。

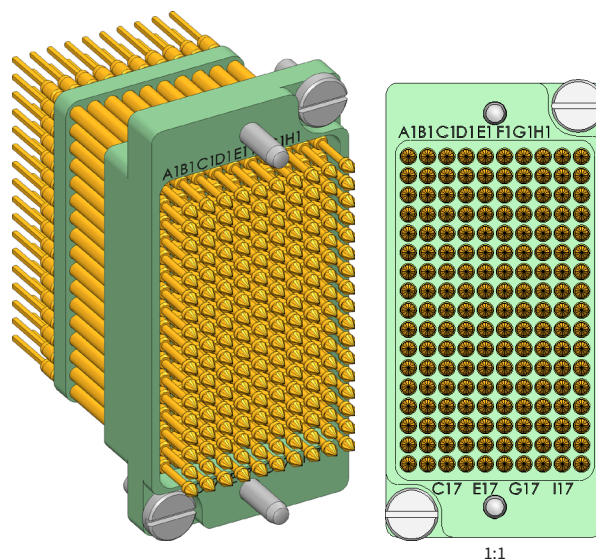

1:1

交付

交货时已完全装配，包括安装材料。

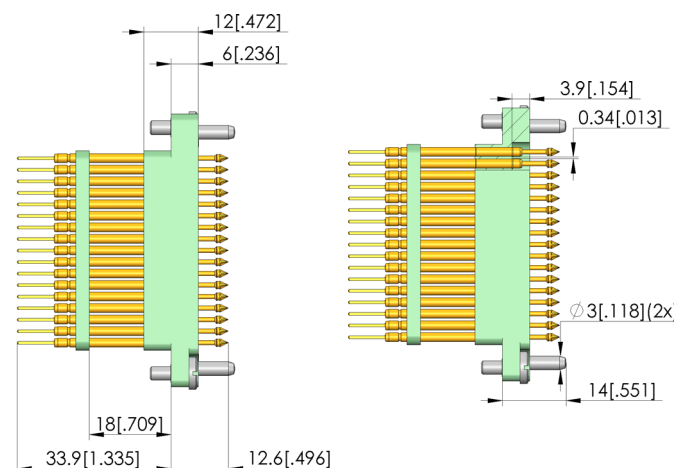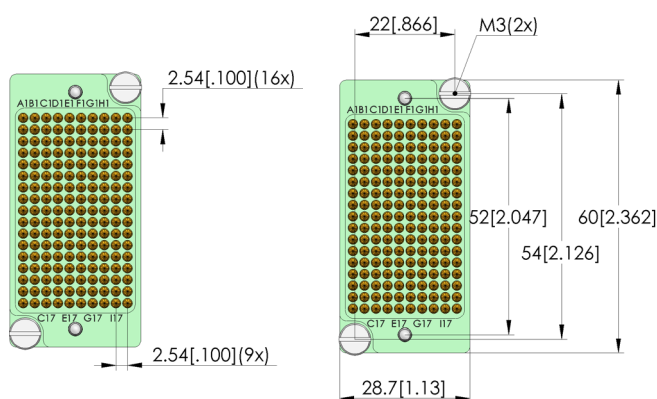

一般数据

产品组:	接口模块 (SB)
结构系列:	SB-SI
类型:	信号模块
规格:	测试系统侧
配件类型:	扩展配件
装配:	HSS-118-0406 & KS-11247
重量:	0,045 kg
最小温度:	-30 °C
最大温度:	80 °C
RoHS 符合性:	是

电气数据

单个弹簧探针 (GKS) 电阻 (Ri) 典型值:	10 mOhm
---------------------------	---------

适用于

合适的配合件 1:
手动测试治具 (MA):
Pylon 接收器:

SB-P-SI-170-4A-0,6-Z
MA 21xx
RC-PYLON-12-V2

技术数据

工作距离:	15,1 +/- 0,5 mm
定心:	+/- 0,3 mm
连接:	绕线柱
工作行程 (GKS):	4 mm
间隙 (未接线):	0,34 mm
弹簧力:	187 N
单个弹簧探针 (GKS) 最大电流:	4 A
所有弹簧探针 (GKS) 最大电流:	1,5 A
最大电压:	270 V
最大功率损耗:	5 W
最小电缆横截面:	0,25 mm ²

Interface block

SB-T-SI-170-4A-N-Z

产品 38694



直接訪問產品

ingun[®]
Partner for Future Technology

Accessories

Part no.	Designation	Version
Connector cable		
43371	ASK-BL10-F-G-0700-AWG26-GE	10 pole, 1x socket strip, yellow, pin-1 brown, 700 mm long
43372	ASK-BL10-F-G-0700-AWG26-GN	10 pole, 1x socket strip, green, pin-1 brown, 700 mm long
115176	ASK-BL10-F-G-0700-AWG26-SW	10 pole, 1x socket strip, black, pin-1 brown, 700 mm long
115177	ASK-BL10-F-G-0700-AWG26-RT	10 pole, 1x socket strip, red, pin-1 brown, 700 mm long
115174	ASK-BL10-F-G-0400-BL10-F-G-GE	10 pole, 2x socket strip, yellow, pin-1 brown, 400 mm long
53129	ASK-BL10-F-G-0400-BL10-F-G-GN	10 pole, 2x socket strip, green, pin-1 brown, 400 mm long
115172	ASK-BL10-F-G-0400-BL10-F-G-SW	10 pole, 2x socket strip, black, pin-1 brown, 400 mm long
115175	ASK-BL10-F-G-0400-BL10-F-G-RT	10 pole, 2x socket strip, red, pin-1 brown, 400 mm long
115179	ASK-BL17-F-G-0700-AWG26-GE	17 pole, 1x socket strip, yellow, pin-1 brown, 700 mm long
115181	ASK-BL17-F-G-0700-AWG26-GN	17 pole, 1x socket strip, green, pin-1 brown, 700 mm long
115178	ASK-BL17-F-G-0700-AWG26-SW	17 pole, 1x socket strip, black, pin-1 brown, 700 mm long
115180	ASK-BL17-F-G-0700-AWG26-RT	17 pole, 1x socket strip, red, pin-1 brown, 700 mm long
115184	ASK-BL17-F-G-0400-BL17-F-G-GE	17 pole, 2x socket strip, yellow, pin-1 brown, 400 mm long
115186	ASK-BL17-F-G-0400-BL17-F-G-GN	17 pole, 2x socket strip, green, pin-1 brown, 400 mm long
115183	ASK-BL17-F-G-0400-BL17-F-G-SW	17 pole, 2x socket strip, black, pin-1 brown, 400 mm long
115185	ASK-BL17-F-G-0400-BL17-F-G-RT	17 pole, 2x socket strip, red, pin-1 brown, 400 mm long
33175	ASK-BL16-F-G-0700-AWG28-64	64 pole, 4x socket strip, 1x VG connector, grey, pin-1 red, 700 mm long

INGUN Prüfmittelbau GmbH

Max-Stromeyer-Straße 162
78467 Konstanz, 德国
中央办公室: +49 7531 8105-0
客户热线: +49 7531 8105-888
传真 +49 7531 8105-65
info@ingun.com



根據要求提供價格和交貨時間。
保留技術更改。11/25_CN