



- Reliable lateral contacting
- Durable, maintenance-free precision guidance
- Space-saving, simple, and precise installation
- Pneumatic actuation



General data


Product group:	Side approach mechanism (SAM)
Series:	SAM-P
Accessory type:	Customising accessories
Contact stroke generation:	Pneumatic
Weight:	0.58 kg [1.27 lbs]
Min. temperature:	-5 °C [23 °F]
Max. temperature:	60 °C [140 °F]

Compatible with

Manual test fixtures (MA):	MA 20xx
Pneumatic test fixtures (PA):	PA xxxx
Vacuum test fixtures (VA):	VA xxxx
MA exchangeable kits (ATS MA):	ATS MAxx

Technical data

Max. contact stroke force:	68 N [244 ozf]
Max. contact stroke:	50 mm [1.96 in]
Contact stroke detection:	Proximity switch, with compatible accessories
Max. lever arm length:	120 mm [4.72 in]
Max. torque:	2 Nm [17.7 lbf·in]
Operating pressure:	6 bar [87 psi]
Compressed air connection:	QS-4
Outer dimensionS (WxDxH):	82 x 105 x 28 mm [3.22 x 4.13 x 1.1 in]

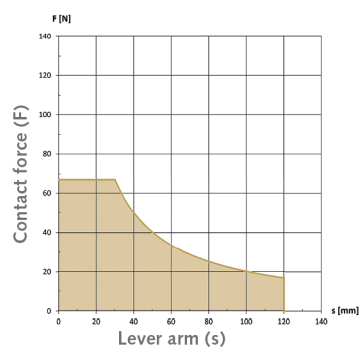

INGUN Prüfmittelbau GmbH

Max-Stromeyer-Straße 162
78467, Constance, Germany
Phone +49 7531 8105-0
Customer hotline +49 7531 8105-888
Fax +49 7531 8105-65
info@ingun.com

