

Rigid Contact Probe

UKS-051 204 051 A


Item UKS-051204051A



GO TO PRODUCT

ingun[®]

Partner for Future Technology

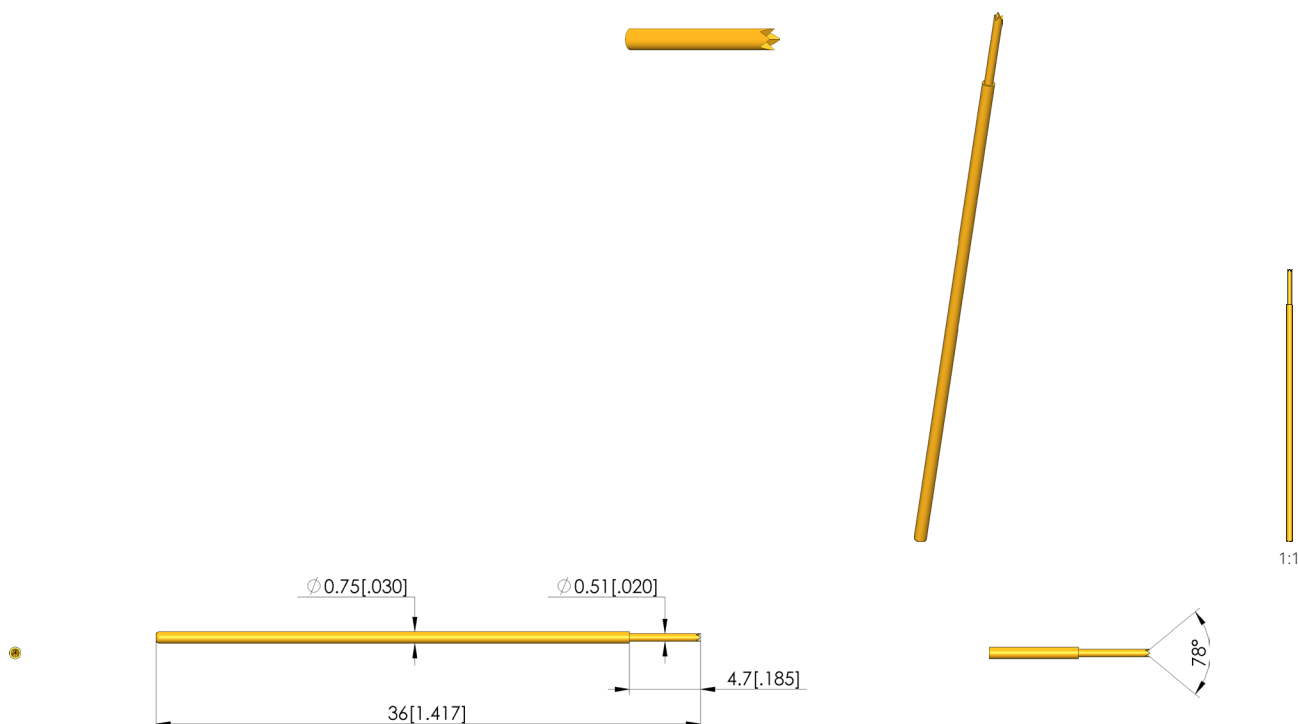

General data

Product group:
Sub-product group:
Series:
Grid:
Contacting from:
Magnetic:
Installation type:
Quick-exchange system:
Adjustable installation height:
Non-rotating:
Min. temperature:
Max. temperature:
RoHS-compliant:

Accessories (GKS / ADA)
RF inner conductor
UKS-051
1.27 mm [50 mil]
Pad
Yes
Plug-in
Yes
No
No
-100 °C [-148 °F]
200 °C [392 °F]
Yes

Tip style data

Tip style: 04 4-point crown
Tip diameter: 0.51 mm [.02 in]
Tip style surface: A gold
Tip style material: 2 steel

Electrical data

Current load capacity / rated current: 2 A
Typical resistance (Ri): 20 mOhm

Mechanical data

Total length: 36 mm [1.41 in]
Barrel diameter: 0.75 mm [.029 in]
Maximum stroke: 0 mm [0 in]
Spring pre-load: 0 N [0 ozf]
Collar height: 00
Spring force at working stroke: 0 N [0 ozf]
Recommended working stroke: 0 mm [0 in]

INGUN Prüfmittelbau GmbH

Max-Stromeyer-Straße 162
78467, Constance, Germany
Phone +49 7531 8105-0
Customer hotline +49 7531 8105-888
Fax +49 7531 8105-65
info@ingun.com



Prices and delivery times on request.
Technical changes reserved. 03/26_GB

Learn more about
Test probes

