




- Precise, low-wear contacting of USB plug connectors
- Outstanding service life
- Reliable data transmission
- Signal transmission via original connector plug or solder connection
- Optional spring elements (112863: set of 2) can compensate for tolerances of ± 0.4 mm and positioning inaccuracies.

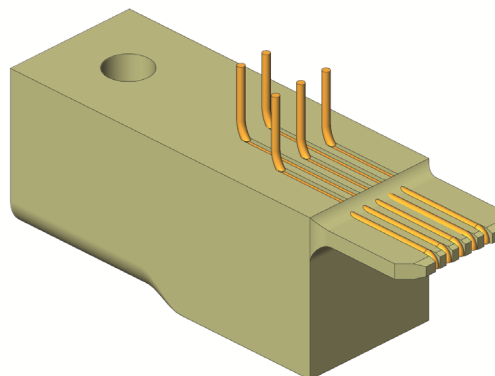

General data

Product group:	PS test plug
Series:	PS
Sub-series:	PS-USB
Grid:	14.5 mm [570 mil]
DUT / contact:	USB MINI Type B
DUT interface gender :	F signal conductor female / socket
KS sub-series:	PSA-F7,6
Width:	7.6 mm [.299 in]
Height:	8.4 mm [.33 in]
Min. temperature:	-80 °C [-112 °F]
Max. temperature:	150 °C [302 °F]
RoHS-compliant:	Yes

Inner conductor data

Inner conductor max. current load capacity:	1 A
Number of inner conductor poles:	5

Mechanical data

Total length:	25 mm [.984 in]
---------------	-----------------

Test plug


PS-USB-Mini-B-005-F7,6

Item 21072



ingun[®]

Partner for Future Technology

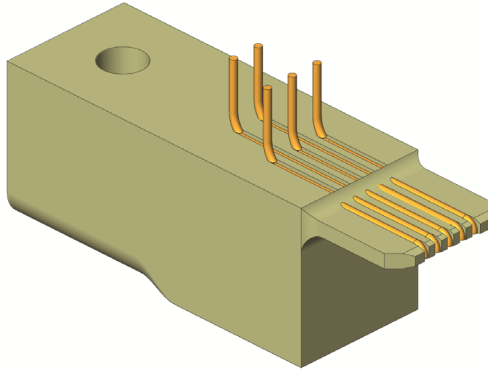

INGUN Prüfmittelbau GmbH

Max-Stromeyer-Straße 162
78467, Constance, Germany
Phone +49 7531 8105-0
Customer hotline +49 7531 8105-888
Fax +49 7531 8105-65
info@ingun.com



Prices and delivery times on request.
Technical changes reserved. 11/25_GB

Learn more about
Test probes

