

Stroke Measurement Probe

HMS-075 302 120 A


Item HMS-075-0003



GO TO PRODUCT

ingun[®]

Partner for Future Technology

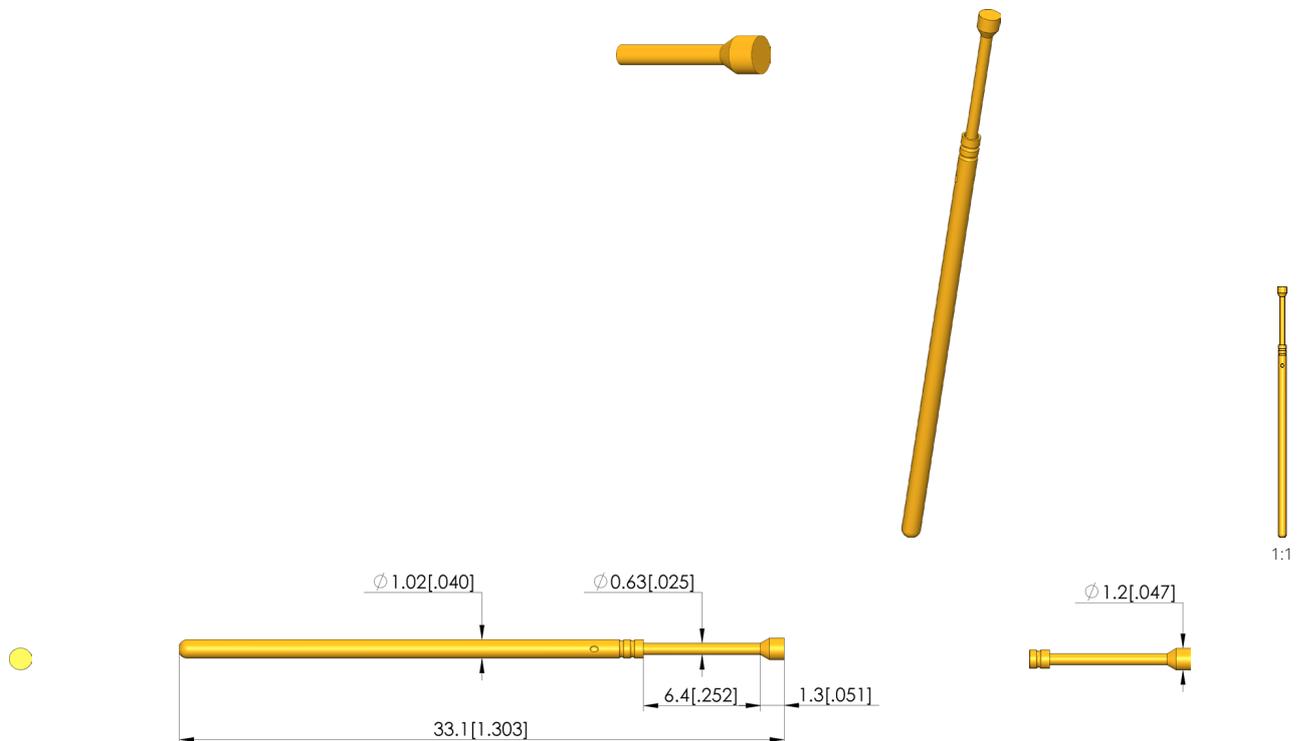

General data

| | |
|---------------------------------|-------------------------|
| Product group: | Accessories (GKS / ADA) |
| Sub-product group: | Stroke-measuring probe |
| Series: | HMS-075 |
| Grid: | 1.91 mm [75.1 mil] |
| Contacting from: | Post |
| Magnetic: | Yes |
| Installation type: | Plug-in |
| Quick-exchange system: | Yes |
| Adjustable installation height: | No |
| Non-rotating: | No |
| Compatible receptacle(s): | KS-075 |
| Min. temperature: | -40 °C [-40 °F] |
| Max. temperature: | 80 °C [176 °F] |
| RoHS-compliant: | Yes |

Tip style data

| | |
|---------------------|------------------|
| Tip style: | 02 flat |
| Tip diameter: | 1.2 mm [.047 in] |
| Tip style surface: | A gold |
| Tip style material: | 3 CuBe |

Mechanical data

| | |
|-----------------------------|------------------|
| Total length: | 33.1 mm [1.3 in] |
| Barrel diameter: | 1.02 mm [.04 in] |
| Maximum stroke: | 6.35 mm [.25 in] |
| Collar height: | 00 |
| Recommended working stroke: | 4.3 mm [.169 in] |

INGUN Prüfmittelbau GmbH

Max-Stromeyer-Straße 162
78467, Constance, Germany
Phone +49 7531 8105-0
Customer hotline +49 7531 8105-888
Fax +49 7531 8105-65
info@ingun.com



Prices and delivery times on request.
Technical changes reserved. 01/26_GB

Learn more about
Test probes

