

Receptacle

KS-050 E08 V-30

Item KS-050E08V-30



GO TO PRODUCT


ingun[®]

Partner for Future Technology

INGUN SELECTION



1:1

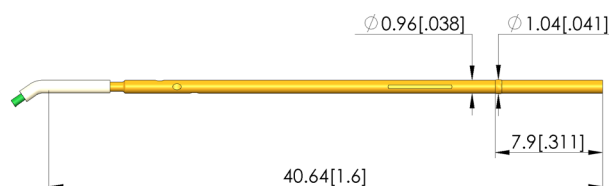

General data

Product group:
Series:
Sub-series:
Type of receptacle connection:
Press ring:
Surface area:
Collar diameter:
Collar height:
Knurl:
Vacuum-tight:
RoHS-compliant:

Receptacles (KS)
KS-050
KS-050 press-in version
Pre-wired
Yes
Gold
1.04 mm [.04 in]
7.9 mm [.311 in]
No
yes (< 1 ccm / min)
Yes

Wiring data

Wire type AWG:
Wire type:
Insulating material:
Wire outer diameter:
Wire length:
Wire diameter:
Wire colour:
Kink protection:

30 type 2
Solid
Tefzel
0.55 mm [.021 in]
1,000 mm [39.3 in]
0.25 mm [.009 in]
Green
Yes

Mechanical data

Total length:
Outer diameter:

40.6 mm [1.59 in]
0.95 mm [.037 in]

Mounting hole

Mounting hole in CEM1:
Mounting hole in FR4:
Mounting hole with press ring in CEM1:
Mounting hole with press ring in FR4:

0.98 – 1 mm [.038 – .039 in]
0.98 – 1 mm [.038 – .039 in]
0.98 – 1 mm [.038 – .039 in]
0.98 – 1 mm [.038 – .039 in]

INGUN Prüfmittelbau GmbH

Max-Stromeyer-Straße 162
78467, Constance, Germany
Phone +49 7531 8105-0
Customer hotline +49 7531 8105-888
Fax +49 7531 8105-65
info@ingun.com



Prices and delivery times on request.
Technical changes reserved. 11/25_GB

Learn more about
Test probes



ingun.com