








- EMC-compliant radio-frequency transfers for connecting highly sensitive PCBs to the measuring system, from and into the shielding area
- Interference-free transmission of low voltage and serial signals
- Capacity 820 pF
- 50 mating cycles



**Application**

The radio-frequency transfer with integrated interference suppression filter is used to transmit low-voltage and serial signals from and into the radio frequency chamber. The filter with a capacitance of 820 pF ensures that unwanted signals cannot pass through the shielding area.

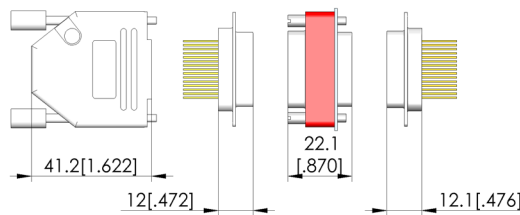

**General data**

Product group:	RF accessories
Series:	HF-U
Type:	RF transfer
Version:	D-sub plug connector
Accessory type:	Customising accessories
Scope of delivery:	Unassembled
Weight:	0.03 kg [0.066 lbs]
Min. temperature:	-25 °C [-13 °F]
Max. temperature:	85 °C [185 °F]
RoHS-compliant:	Yes

**Compatible with**

Exchangeable kits version:	HF
MA exchangeable kits (ATS MA):	ATS MAxx/HF/ESD

**Technical data**

Connection:	Wire-wrap posts
Force:	170 N [611 ozf]
Max. current:	7.5 A
Max. voltage:	100 VDC
Contact resistance:	10 mOhm
Number of poles:	15
Capacity:	820 pF

RF transfer

# HF-U-SUBD-15-820pF-WW



Item 116388



GO TO PRODUCT

**ingun**<sup>®</sup>

Partner for Future Technology

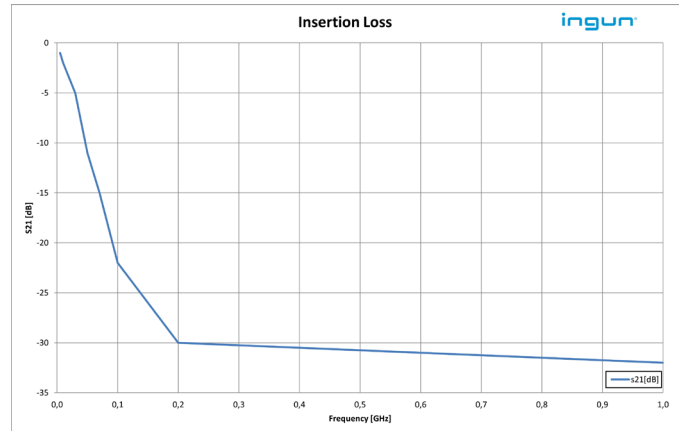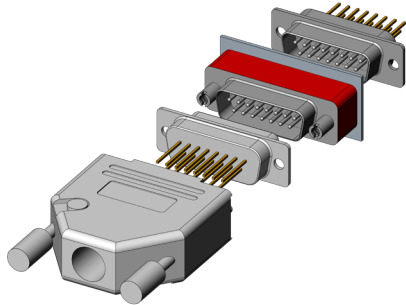

Technical information	
Designation	Version
Filter	LC circuit (Pi filter)
Insertion force	170 N
Extraction force	170 N
Quality class	QC 2

## INGUN Prüfmittelbau GmbH

Max-Stromeyer-Straße 162  
78467, Constance, Germany  
Phone +49 7531 8105-0  
Customer hotline +49 7531 8105-888  
Fax +49 7531 8105-65  
info@ingun.com



Prices and delivery times on request.  
Technical changes reserved. 11/25\_GB