


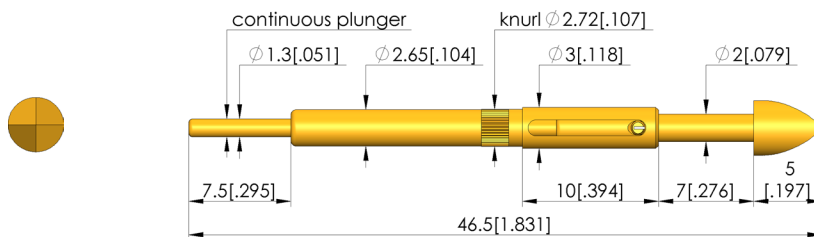




Durchgangsprüfung

Zur Überprüfung von möglichen offenen Verbindungen, Kurzschlüssen und Fehlverdrahtungen



General data

Product group:
Sub-product group:
Series:
Grid:
Contacting from:
Magnetic:
Installation type:
Quick-exchange system:
Type of test probe connection:
Adjustable installation height:
Non-rotating:
Continuous plunger:
Compatible connector(s):
Compatible receptacle(s):
Min. temperature:
Max. temperature:
RoHS-compliant:

Screw-in test probe
Non-rotating test probes
GKS-714
5.08 mm [200 mil]
Flat contact
Yes
Plug-in
Yes
Plug
No
Yes
 $\phi 1,3 \times 7,5$
SE-503
KS-714 23
-40 °C [-40 °F]
80 °C [176 °F]
Yes

Tip style data

Tip style:
Tip diameter:
Tip style surface:
Tip style material:

22 crown, 2 points, self-cleaning
4 mm [.157 in]
A gold
2 steel

Electrical data

Current load capacity / rated current:
Typical resistance (Ri):

8 A
30 mOhm

Mechanical data

Total length:
Barrel diameter:
Maximum stroke:
Spring pre-load:
Collar height:
Spring force at working stroke:
Recommended working stroke:

46.5 mm [1.83 in]
2.65 mm [.104 in]
7 mm [.275 in]
0.38 N [1.36 ozf]
10
1.5 N [5.39 ozf]
6 mm [.236 in]

Test Probe


GKS-714 222 400 A 1510

Item GKS-714-0023



ingun[®]

Partner for Future Technology

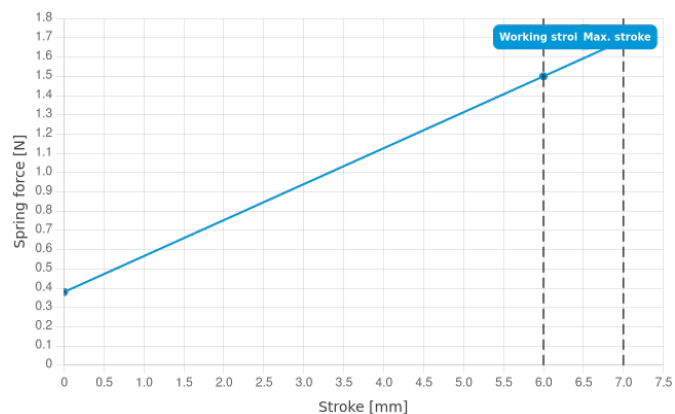

INGUN Prüfmittelbau GmbH

Max-Stromeyer-Straße 162
78467, Constance, Germany
Phone +49 7531 8105-0
Customer hotline +49 7531 8105-888
Fax +49 7531 8105-65
info@ingun.com



Prices and delivery times on request.
Technical changes reserved. 12/25_GB

Learn more about
Screw-in test probe



ingun.com

SCREW-IN TEST PROBE