

Receptacle

KS-550 47 E08


Item KS-55047E08



GO TO PRODUCT

ingun[®]

Partner for Future Technology

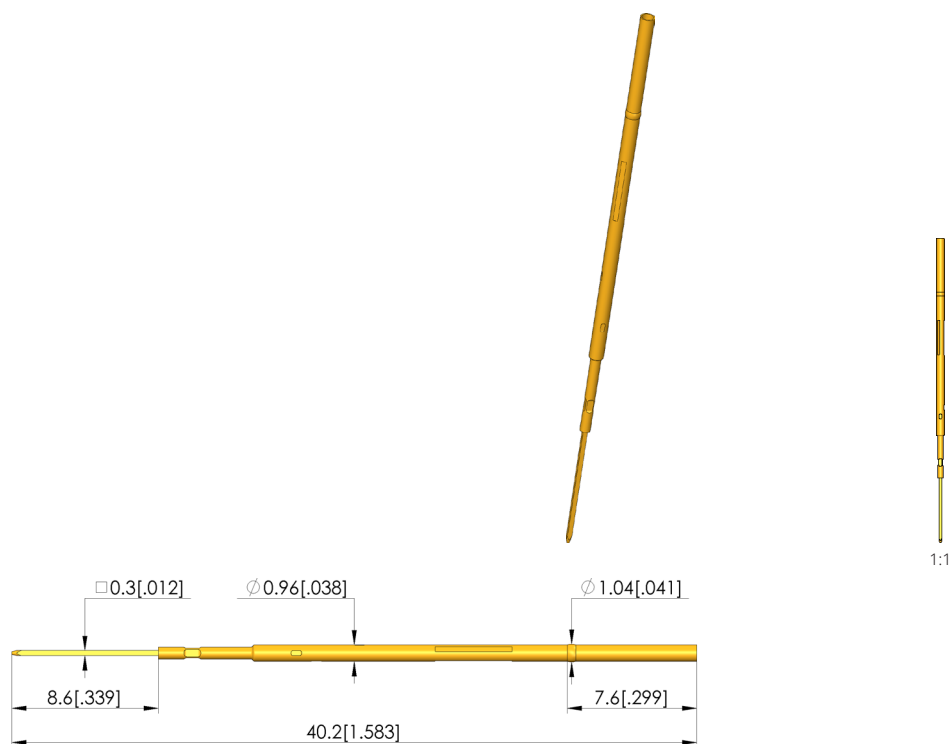

General data

Product group:
Series:
Sub-series:
Type of receptacle connection:
Press ring:
Surface area:
Collar diameter:
Collar height:
Wire-wrap post length:
Knurl:
Vacuum-tight:
RoHS-compliant:

Receptacles (KS)
KS-550
KS-550 press-in version
Wire-wrap
Yes
Gold
1.05 mm [.041 in]
7.6 mm [.299 in]
8.6 mm [.338 in]
No
yes (< 1 ccm / min)
Yes

Mechanical data

Total length: 40.2 mm [1.58 in]
Outer diameter: 0.95 mm [.037 in]

Mounting hole

Mounting hole in CEM1: 0.96 – 0.98 mm [.037 – .038 in]
Mounting hole in FR4: 0.97 – 0.99 mm [.038 – .039 in]
Mounting hole with press ring in CEM1: 0.96 – 0.98 mm [.037 – .038 in]
Mounting hole with press ring in FR4: 0.97 – 0.99 mm [.038 – .039 in]

INGUN Prüfmittelbau GmbH

Max-Stromeyer-Straße 162
78467, Constance, Germany
Phone +49 7531 8105-0
Customer hotline +49 7531 8105-888
Fax +49 7531 8105-65
info@ingun.com



Prices and delivery times on request.
Technical changes reserved. 11/25_GB

Learn more about
Test probes



ingun.com

RECEPTACLES